
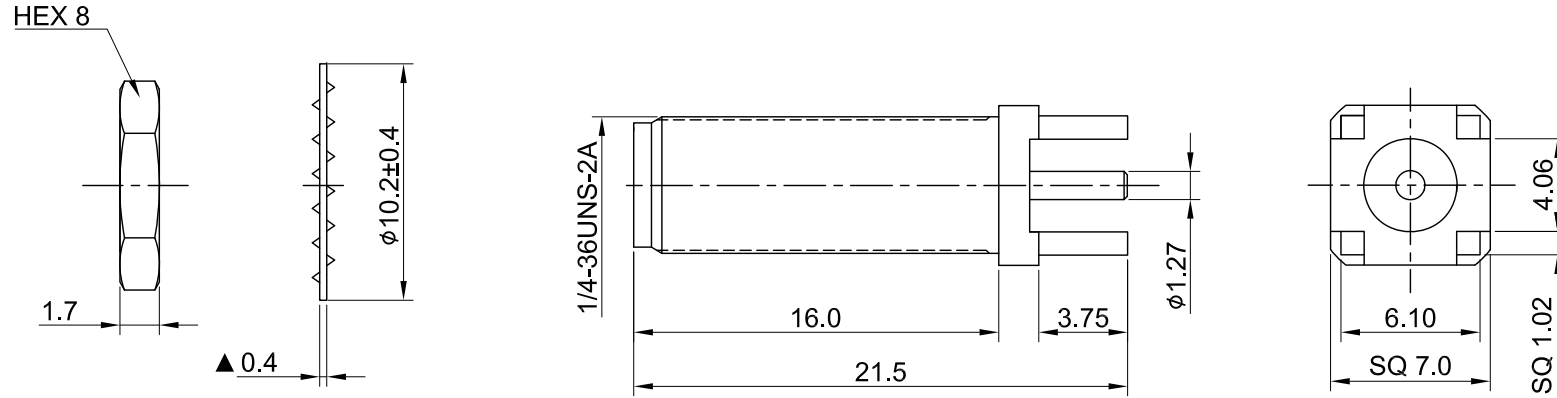


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2019/01/02
1.10	NEW DRAWING FRAME	2023/11/29
1.20	ADD RECOMMENDED MOUNTING HOLE, DIM 0.4	2024/06/13

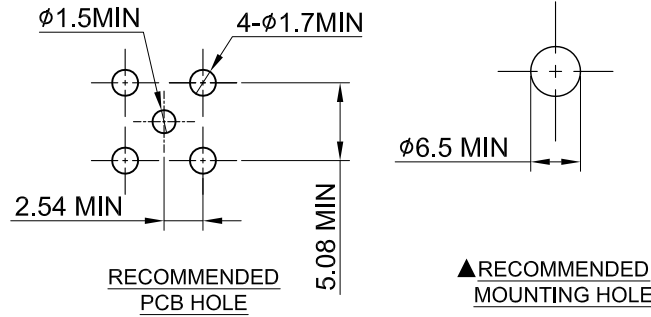

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1000V  
 INSULATION RESISTANCE : 5000 MΩ MIN

TITLE		DRAWN BY: Kelly		2024/06/13	
SMA(F) st. bh. PCB type, L=21.5mm		CHK'D BY: Chilli		2024/06/13	
DWG NO. C02AO3101C		CUST. P/N: N/A		DWG NO: N/A	
SHEET 1 of 1		Unit: mm		DA2406130023	
GENERAL TOLERANCES		DRAWN BY: Kelly		2024/06/13	
.X ±0.2		CHK'D BY: Chilli		2024/06/13	
.XX ±0.2		REVISION		REV. 1.20	
.XXX ±0.2		DA2406130023		1.20	
ANGLES N/A					

NO	DESCRIPTION	MATERIAL	FINISH	Q'TY
05	WASHER	BRASS	GOLD	1
04	NUT	BRASS	GOLD	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1