



REV	DESCRIPTION	DATE
1.20	CHG Barrel OD $\phi$ 4.6 w. $\phi$ 4.68	2020/08/25
1.30	NEW DRAWING FRAME	2023/12/26



RECOMMENDED STRIP LENGTHS

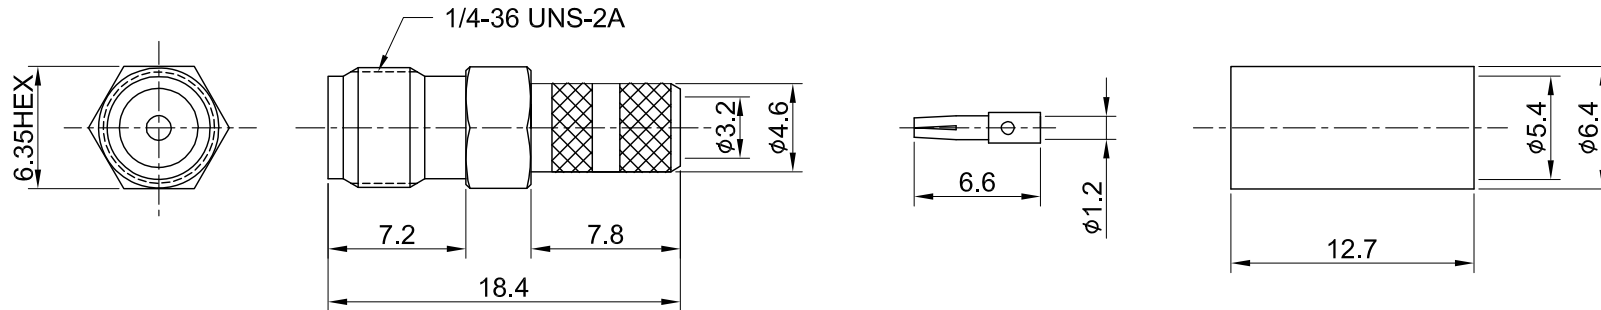

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC ~ 6GHz  
 IMPEDANCE : 50 $\Omega$   
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1000V  
 INSULATION RESISTANCE : 5000 M $\Omega$  MIN

04	FERRULE	BRASS	GOLD	1
03	INSULATOR	TEFLON	NONE	1
02	PIN	Be Cu	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		CHK'D BY:		REV.	
SMA Straight Jack Crimp for LMR200 Cable		Lottie	2023/12/26	Kelly	2023/12/26	1.30	
DWG NO. C02AA31L20012		GENERAL TOLERANCES		DA2312180010			
CUST. P/N: N/A DWG NO: N/A		.X $\pm$ 0.2	.XX $\pm$ 0.2	.XXX $\pm$ 0.2	ANGLES N/A		
SHEET 1 of 1	Unit: mm						

