



REV	DESCRIPTION	DATE
1.10	CHG BARREL OD4.68 W. 4.65, CHG STIP DIM 2.0/2.3/8.0 W. 2.0/2.0/7.5	2017/06/03
1.20	NEW DRAWING FRAME	2023/12/21





RECOMMENDED STRIP LENGTHS

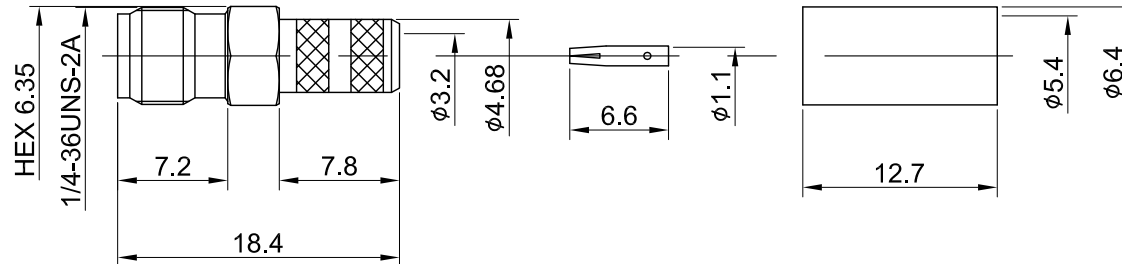

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

04	FERRULE	BRASS	GOLD	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE	
SMA(F) st. crimp for RG58	
DWG NO. C02AA31058A12	
CUST. P/N: N/A DWG NO: N/A	
SHEET 1 of 1	Unit: mm
GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	DRAWN BY: Kelly 2023/12/21 CHK'D BY: Chilli 2023/12/21  REV. 1.20 DA2312180023