
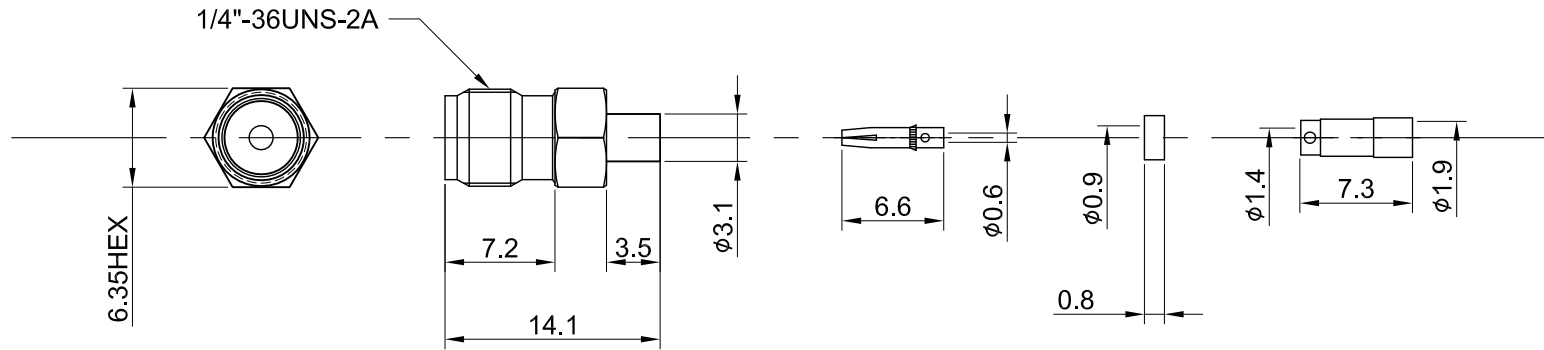


REV	DESCRIPTION	DATE
2.00	CHG SLEEVE FINISH NICKEL w. COPPER-TIN-ZINC	2011/09/08
2.10	NEW DRAWING FRAME	2023/12/20



MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC ~ 6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 170V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 5000 MΩ MIN

TITLE		DRAWN BY:		DATE	
SMA Straight Jack Crimp for RG178 Cable		Lottie	2023/12/20		
DWG NO. C02AA31178012C		CHK'D BY:	Kelly	2023/12/20	
CUST. P/N: N/A DWG NO: N/A					
SHEET 1 of 1		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		REV. 2.10 DA2312180004	

NO	DESCRIPTION	MATERIAL	FINISH	Q'TY
05	INSULATOR B	TEFLON	NONE	1
04	SLEEVE	BRASS	NICKEL	1
03	INSULATOR A	TEFLON	NONE	1
02	PIN	Be Cu	GOLD	1
01	BODY	BRASS	GOLD	1