




REV	DESCRIPTION	DATE
B	ADD DIM TOLERANCES	2010/01/27
1.10	NEW DRAWING FRAME	2024/05/17

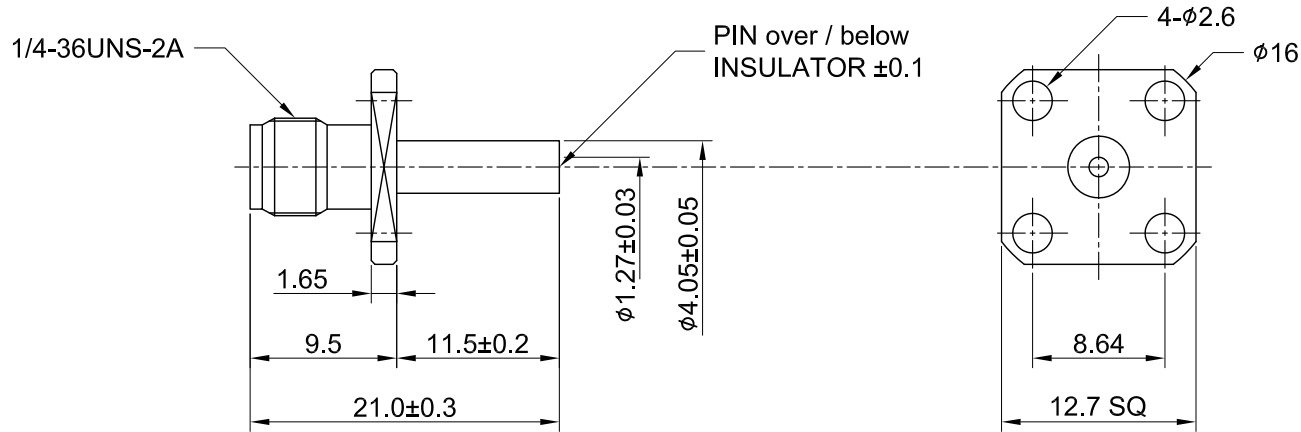

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~18GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 1000 MΩ MIN

04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE	
SMA (F) 4 hole panel with 11.5mm extented PTFE	
DWG NO. C02AM3106H	
CUST. P/N: N/A DWG NO: N/A	
SHEET 1 of 1	GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A
Unit: mm	DRAWN BY: Kelly 2024/05/17 CHK'D BY: Chili 2024/05/17  REV. 1.10 DA2405170012