



REV	DESCRIPTION	DATE
1.20	ADD INSULATOR 6	2011/10/31
1.30	NEW DRAWING FRAME	2024/01/09



RECOMMENDED
STRIP LENGTHS

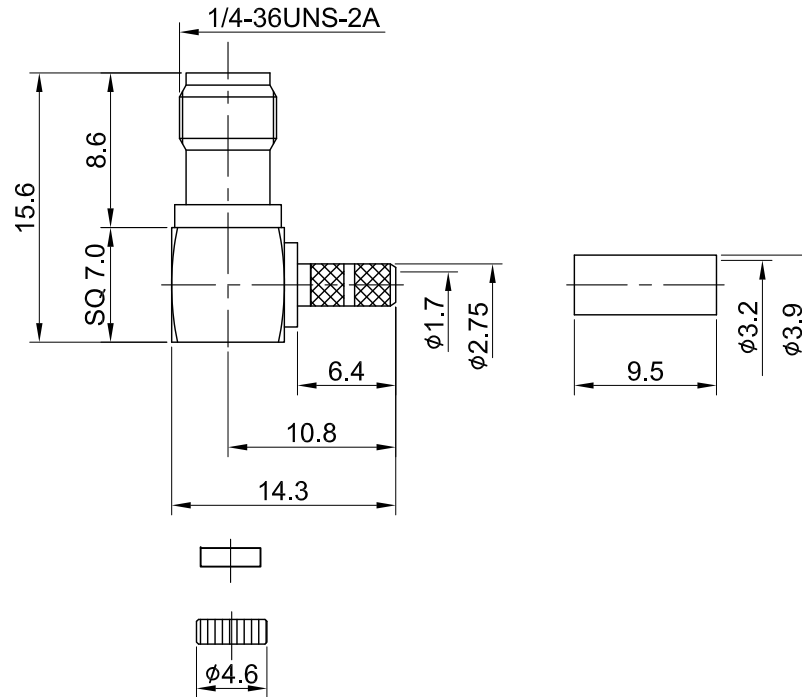

MECHANICAL DATA
DURABILITY : 500 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 375V
WITHSTANDING VOLTAGE : AC 750V
INSULATION RESISTANCE : 5000 MΩ MIN

06	CAP	BRASS	GOLD	1
05	FERRULE	BRASS	GOLD	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		CHK'D BY:		REVISION	
SMA(F) ra. crimp for RG174		Kelly	2024/01/09	Eileen	2024/01/09	REV. 1.30	
DWG NO. C02BA31174033		DRAWN BY: Kelly 2024/01/09		CHK'D BY: Eileen 2024/01/09		REV. 1.30	
CUST. P/N: N/A DWG NO: N/A		DRAWN BY: Kelly 2024/01/09		CHK'D BY: Eileen 2024/01/09		REV. 1.30	
SHEET 1 of 1 Unit: mm		DRAWN BY: Kelly 2024/01/09		CHK'D BY: Eileen 2024/01/09		REV. 1.30	

Wellshow

GENERAL TOLERANCES
.X ±0.2
.XX ±0.2
.XXX ±0.2
ANGLES N/A

DRAWN BY: Kelly 2024/01/09
CHK'D BY: Eileen 2024/01/09

DA2312250024