
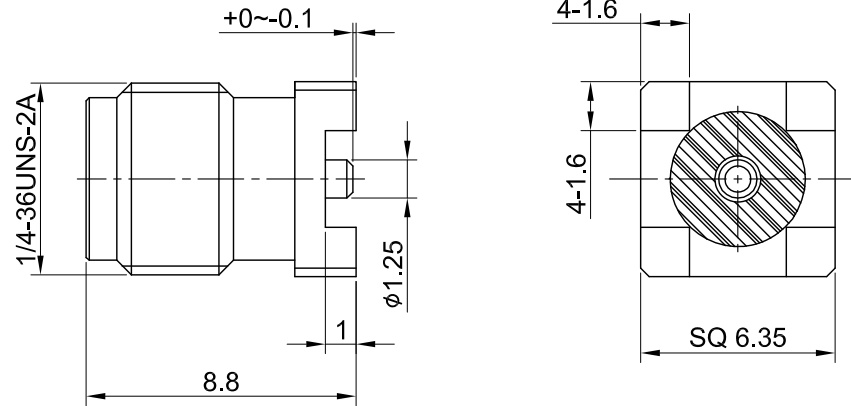


REV	DESCRIPTION	DATE
1.20	CHG DIM +0~-0.1 W. -0.05~-0.1	2015/09/25
2.00	UPDATE DRAWING	2024/06/17

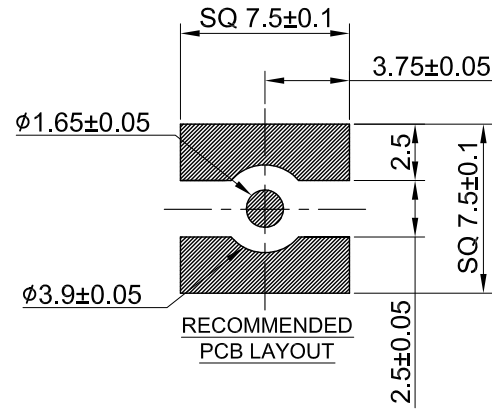

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~18GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/06/17	
SMA(F) st. SMT type		CHK'D BY: Chilli		2024/06/17	
DWG NO. C02AN3F48		REVISIONS		REV. 2.00	
CUST. P/N: N/A		GENERAL TOLERANCES		DA2406170015	
DWG NO: N/A		.X ±0.2		ANGLES N/A	
SHEET 1 of 1		Unit: mm			

