



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2021/12/15
1.10	ADD DIM $\phi 0.9/\phi 1.4/\phi 1.9$	2024/01/10



RECOMMENDED STRIP LENGTHS

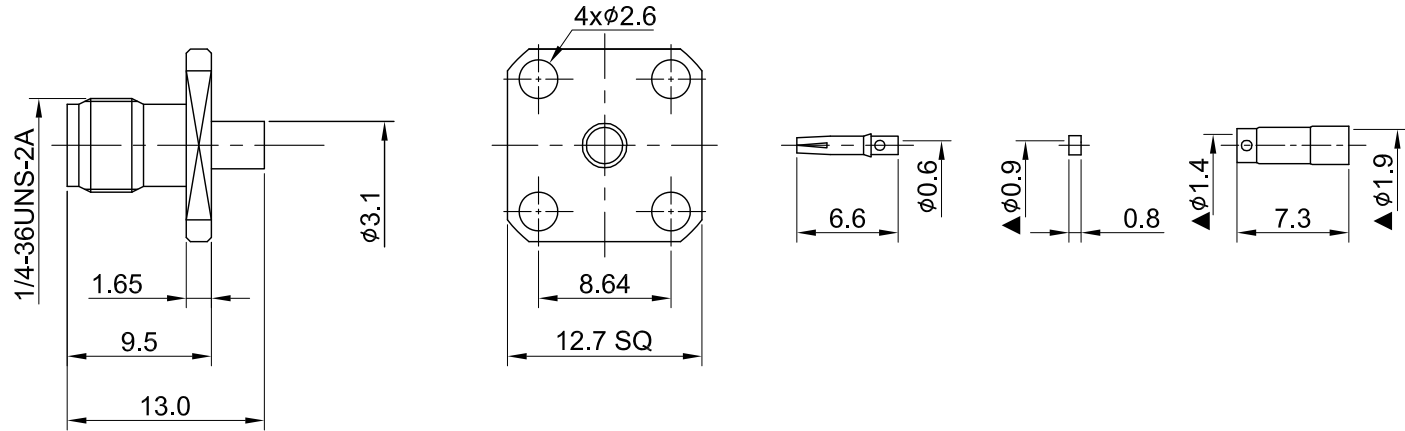

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 170V  
 WITHSTANDING VOLTAGE : AC 500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

TITLE  
 SMA(F)st. 4 hole panel for RG178, SQ:12.7, (Ni)

NO	DESCRIPTION	MATERIAL	FINISH	Q'TY
05	SLEEVE	BRASS	NICKEL	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1

DWG NO. C02CG31178018A
CUST. P/N: N/A DWG NO: N/A
SHEET 1 of 1 Unit: mm

GENERAL TOLERANCES

.X ±0.2

.XX ±0.2

.XXX ±0.2

ANGLES N/A

DRAWN BY: Kelly 2024/01/10

CHK'D BY: Eileen 2024/01/10

REV. 1.10

DA2312260004