


REV	DESCRIPTION	DATE
A	INITIAL DESIGN	2010/06/21
1.10	NEW DRAWING FRAME	2024/07/11

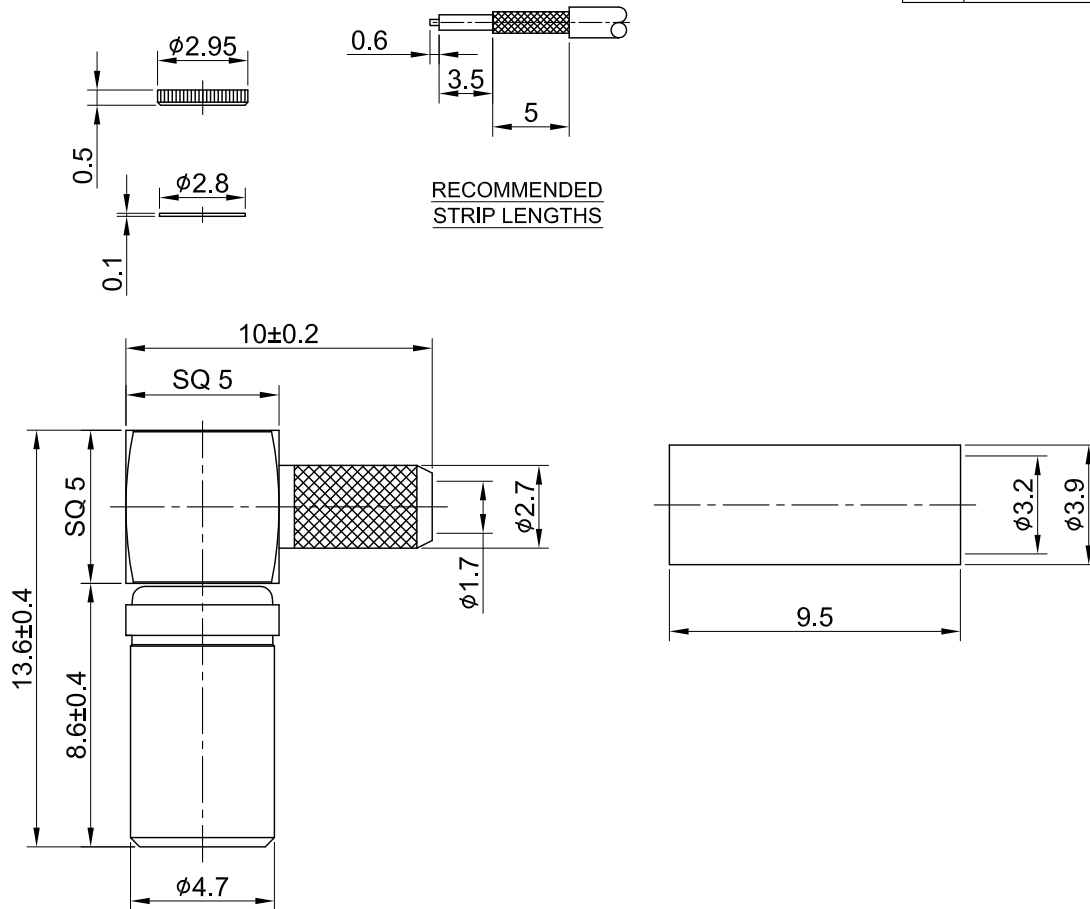

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~4GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 175V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 MΩ MIN

09	FERRULE	BRASS	GOLD	1
08	SHELL	BRASS	GOLD	1
07	BODY C	P.BRONZE	GOLD	1
06	CENTER PIN	P.BRONZE	GOLD	1
05	INSULATOR	TEFLON	NONE	1
04	BODY B	BRASS	GOLD	1
03	BODY A	BRASS	GOLD	1
02	INSULATOR COVER	DELTRIN	NONE	1
01	COVER	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE
 SSMB(M) ra. for RG174

DWG NO.
 C11BA3F174001D

CUST.
 P/N: N/A
 DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES		DRAWN BY: Kelly 2024/07/11	
.X	±0.2		REV. 1.10
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A	CHK'D BY: Chili 2024/07/11 DA2407110013	