


REV	DESCRIPTION	DATE
3.10	NEW DRAWING FRAME	2023/07/25
3.11	CORRECT INSULATION RESISTANCE UNIT	2023/12/14

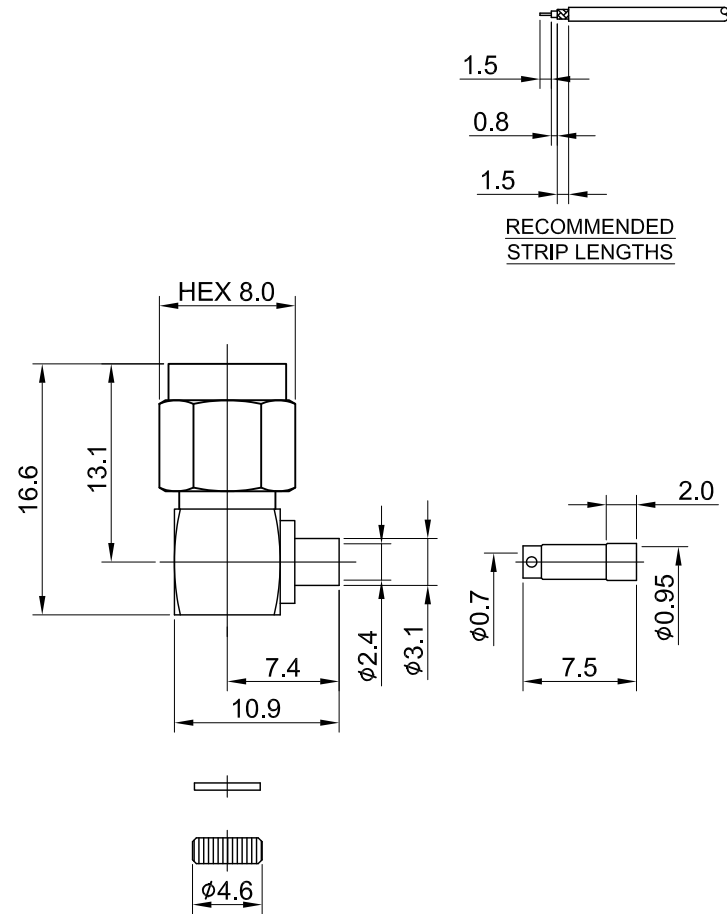

09	INSULATOR B	TEFLON	NONE	1
08	CAP	BRASS	GOLD	1
07	SLEEVE	BRASS	NICKEL	1
06	GASKET	SILICONE RUBBER	NONE	1
05	RING	Be Cu	NONE	1
04	SHELL	BRASS	GOLD	1
03	INSULATOR A	TEFLON	NONE	1
02	PIN	BRASS	GOLD	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE
SMA R/A Plug Crimp for 0.81 Cable

DWG NO.
C01BA31081008

CUST.
P/N: N/A
DWG NO: N/A

SHEET 1 of 1 Unit: mm




GENERAL
TOLERANCES

.X ±0.2
.XX ±0.2
.XXX ±0.2
ANGLES N/A

DRAWN BY: Kelly 2023/12/14

CHK'D BY: David 2023/12/14



DA2312130025

REV.

3.11

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 170V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 5000 M.Ω MIN