



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2014/07/15
1.10	CHG 9.6 /ø3/ 1 W. 9.5/ ø3.5/ 1.2	2023/05/25

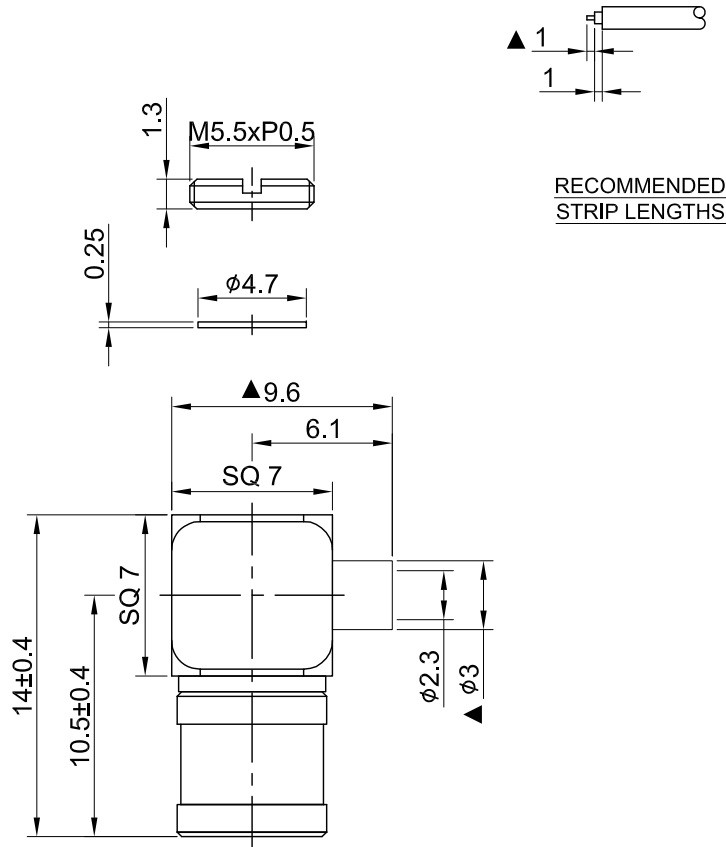

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

DIELECTRICAL DATA  
 FREQUENCY RANGE: DC~4GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 335V  
 WITHSTANDING VOLTAGE : AC 750V  
 INSULATION RESISTANCE : 1000 mΩ MIN

08	COVER	BRASS	GOLD	1	TITLE SMB(M) ra. solder type for .085 cable					
07	INSULATOR COVER	PET	NONE	1						
06	PIN	Be.Cu	GOLD	1						
05	BODY B	BRASS	NICKEL	1	DWG NO. C03BA3F085001A		DRAWN BY: Kelly 2023/05/25			
04	INSULATOR	TEFLON	NONE	1	CUST. P/N: N/A DWG NO: N/A		CHK'D BY: Chili 2023/05/25			
03	BODY A	BRASS	GOLD	1					REV.	
02	SHELL	BRASS	GOLD	1					DA2305250003	
01	INNER RETAINING RING	Be.Cu	GOLD	1	SHEET 1 of 1 Unit: mm					
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY						

GENERAL TOLERANCES		DRAWN BY: Kelly 2023/05/25	
.X	±0.2	CHK'D BY: Chili 2023/05/25	
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A	REV.	
		1.10	