




REV	DESCRIPTION	DATE
1.10	NEW DRAWING FRAME	2023/08/04
1.20	CORRECT INSULATION RESISTANCE	2023/11/15
1.30	CHG DIM $\phi 1.82$ W. $\phi 1.8$, ADD STRIP DIM 1	2023/12/15

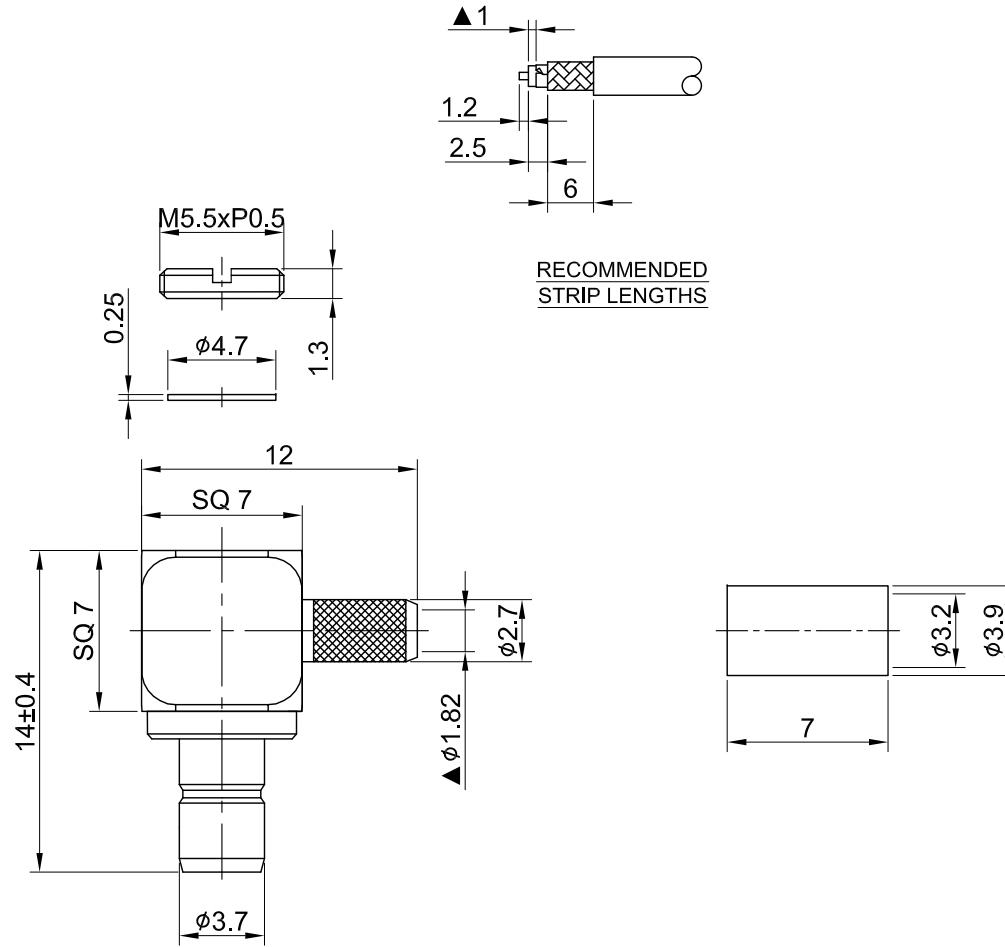

MECHANICAL DATA
TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~4GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 335V
WITHSTANDING VOLTAGE : AC 750V
INSULATION RESISTANCE : 1000 MΩ MIN

07	FERRULE	BRASS	GOLD	1
06	INSULATOR B	TEFLON	NONE	1
05	BODY B	BRASS	GOLD	1
04	CENTER PIN	BRASS	GOLD	1
03	BODY A	BRASS	GOLD	1
02	INSULATOR A	PET	NONE	1
01	NUT	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		DATE
SMB(F)RA Crimp for LMR100		Lottie	2023/12/15	
DWG NO. C04BA3FL10011		CHK'D BY:	Kana	2023/12/15
CUST. P/N: N/A DWG NO: N/A				REV.
SHEET 1 of 1		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		1.30
Unit: mm				DA2312120004