
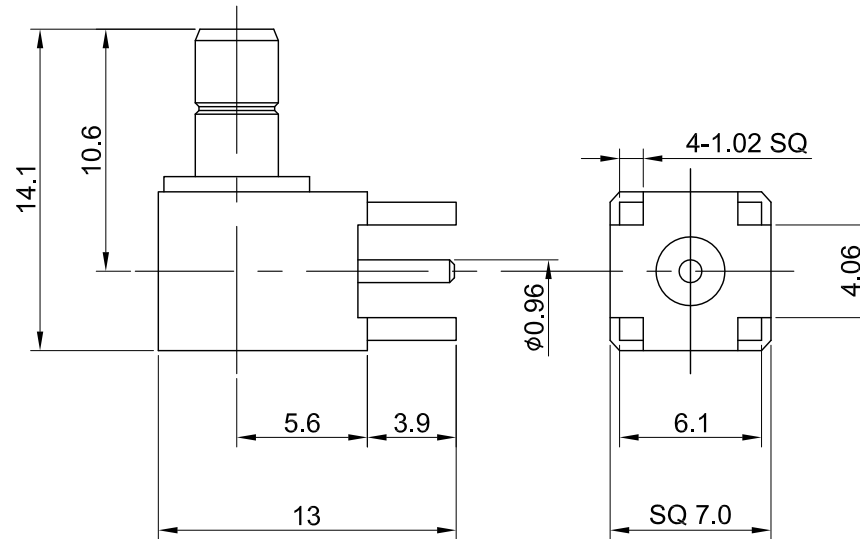


| REV | DESCRIPTION | DATE |
|------|-------------------------------|------------|
| 1.10 | NEW DRAWING FRAME | 2023/06/19 |
| 1.11 | CORRECT INSULATION RESISTANCE | 2023/12/27 |

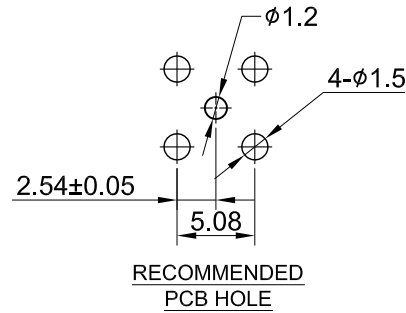

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

DIELECTRICAL DATA
FREQUENCY RANGE: DC~4GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
INSULATION RESISTANCE : 5000 MΩ MIN

| | | | | |
|----|-------------|----------|--------|------|
| 03 | PIN | BRASS | GOLD | 1 |
| 02 | INSULATOR | TEFLON | NONE | 1 |
| 01 | BODY | BRASS | GOLD | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | Q'TY |

| TITLE | | DRAWN BY: Kelly | | 2023/12/27 | |
|------------------------------------|--|------------------|--|--------------|--|
| SMB RA Jack, PCB type, Leg L:3.9mm | | CHK'D BY: Eileen | | 2023/12/27 | |
| DWG NO. C04BN31P00102 | | REVISION | | REV. 1.11 | |
| CUST. P/N: N/A | | DRAWN BY: Kelly | | 2023/12/27 | |
| DWG NO: N/A | | CHK'D BY: Eileen | | 2023/12/27 | |
| SHEET 1 of 1 | | Unit: mm | | DA2312270001 | |



| GENERAL TOLERANCES | | DRAWN BY: Kelly | | 2023/12/27 | |
|--------------------|------|------------------|--|------------|--|
| .X | ±0.2 | CHK'D BY: Eileen | | 2023/12/27 | |
| .XX | ±0.2 | REVISION | | REV. 1.11 | |
| .XXX | ±0.2 | DRAWN BY: Kelly | | 2023/12/27 | |
| ANGLES | N/A | CHK'D BY: Eileen | | 2023/12/27 | |