RoHS

Wellshow Technology

www.wellshow.com

REV	DESCRIPTION	DATE
2.10	NEW DRAWING FRAME	2023/08/02
2.20	CORRECT INSULATION RESISTANCE	2023/11/17



RECOMMENDED
STRIP LENGTHS

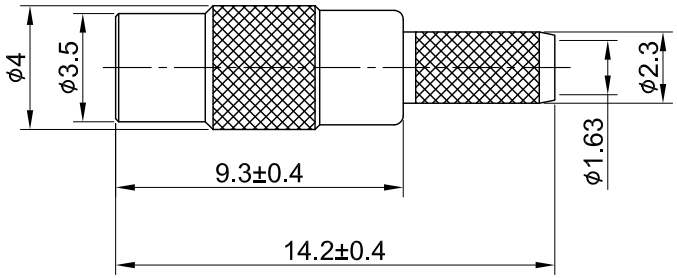



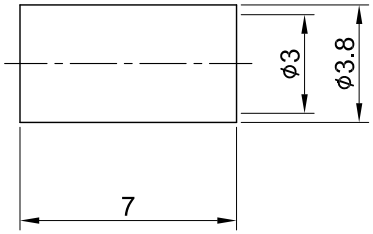

MECHANICAL DATA
DURABILITY : 500 CYCLES
TEMPERATURE RANGE : -65˚C ~ + 165˚C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 170V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 1000 MΩ MIN

NO	DESCRIPTION	MATERIAL	FINISH	Q'TY
05	FERRULE	BRASS	GOLD	1
04	CENTER PIN	Be.Cu	GOLD	1
03	BODY B	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY A	BRASS	GOLD	1

TITLE
MMCX(F) st. crimp for RG174

DWG NO.
C06AA3F174006

CUST.
P/N: N/A
DWG NO: N/A

SHEET 1 of 1

Unit: mm

Wellshow

GENERAL TOLERANCES
.X ±0.2
.XX ±0.2
.XXX ±0.2
ANGLES N/A

DRAWN BY: Lottie 2023/11/17
CHK'D BY: Kana 2023/11/17

DA2311160021

REV. 2.20