
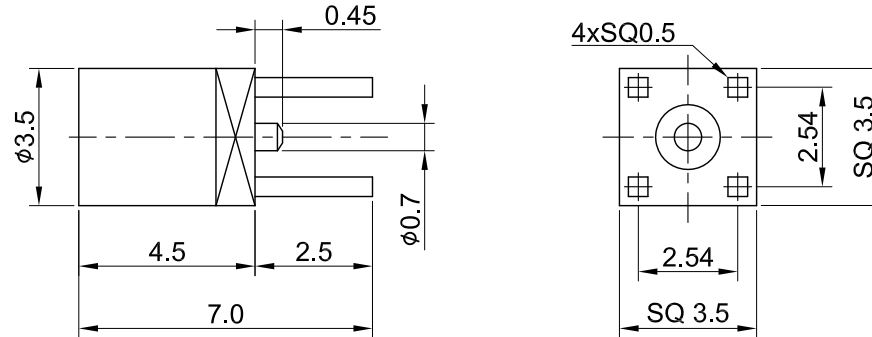


| REV  | DESCRIPTION       | DATE       |
|------|-------------------|------------|
| 1.10 | NEW DRAWING FRAME | 2023/07/10 |

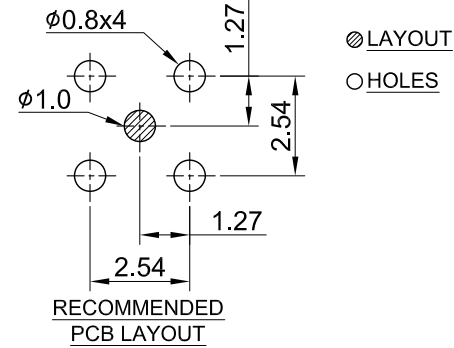

MECHANICAL DATA  
 DURABILITY : 500 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 170V  
 WITHSTANDING VOLTAGE : AC 500V  
 INSULATION RESISTANCE : 1000 mΩ MIN

NOTE  
 MRP NO. C06AN3KPA0502B  
 (IS SAME AS C06AN30PA0502B)

|                                  |  |  |
|----------------------------------|--|--|
| TITLE<br>MMCX(F) st. for PCB     |  |  |
| DWG NO.<br>C06AN3KPA0502B        |  |  |
| CUST.<br>P/N: N/A<br>DWG NO: N/A |  | GENERAL TOLERANCES<br>.X ±0.2<br>.XX ±0.2<br>.XXX ±0.2<br>ANGLES N/A                   |
| SHEET 1 of 1 Unit: mm            |  | DRAWN BY: Kelly 2023/07/10<br>CHK'D BY: Eileen 2023/07/10<br>REV. 1.10<br>DA2307070010 |

| NO | DESCRIPTION | MATERIAL | FINISH | Q'TY |
|----|-------------|----------|--------|------|
| 03 | PIN         | Be.Cu    | GOLD   | 1    |
| 02 | INSULATOR   | PTFE     | NONE   | 1    |
| 01 | BODY        | BRASS    | GOLD   | 1    |