


REV	DESCRIPTION	DATE
1.20	CHG 1.2/ 0.3 W. 0.7/0.8	2023/08/02
1.30	CORRECT INSULATION RESISTANCE	2023/11/14

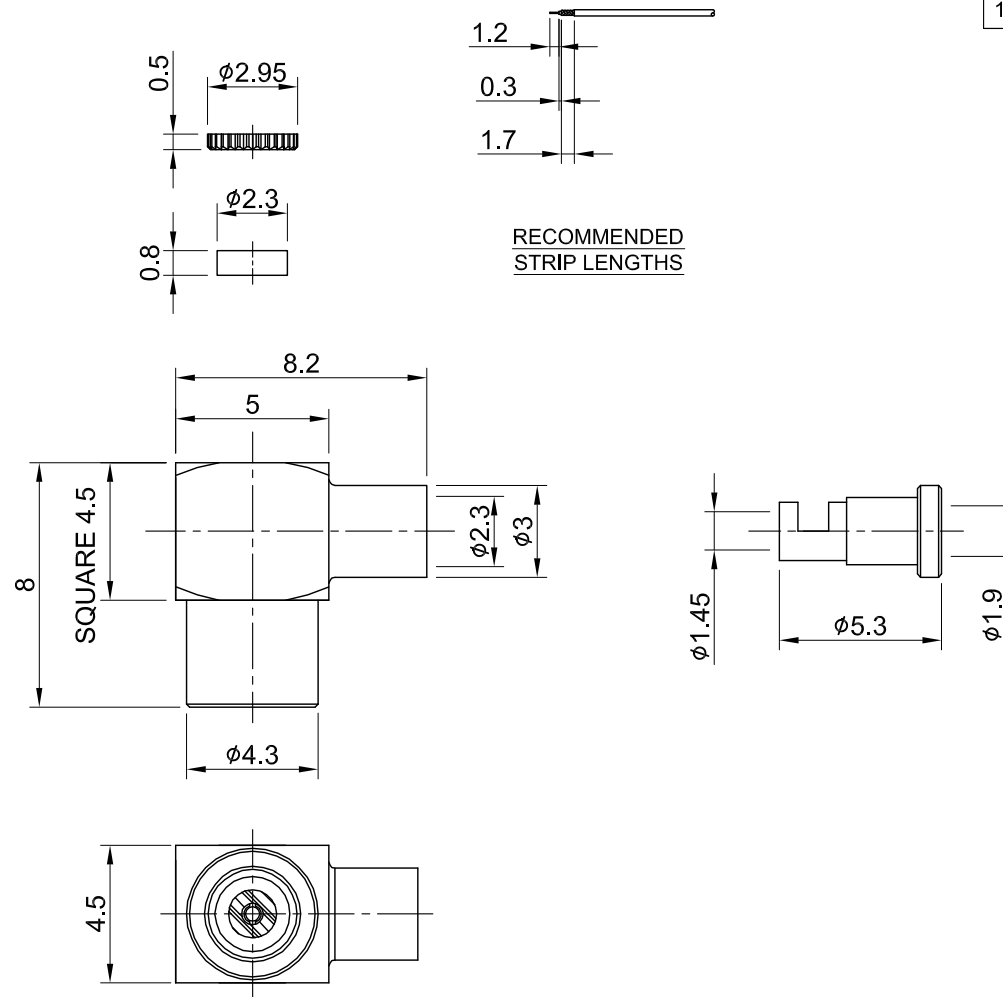


RECOMMENDED STRIP LENGTHS

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : DC~3.0GHz : 1.3 MAX.
 3.01~6.0GHz : 1.5 MAX
 WORKING VOLTAGE : AC 170V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 MΩ MIN

06	FERRULE	BRASS	GOLD	1
05	INSULATOR	TEFLON	NONE	1
04	CENTER PIN	Be.Cu	GOLD	1
03	BODY	BRASS	GOLD	1
02	INSULATOR COVER	POM	NONE	1
01	COVER	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		MMCX(F) ra. for RG178					
DWG NO.		C06BA3F178005B					
CUST.		DRAWN BY: Lottie 2023/11/14					
P/N: N/A		CHK'D BY: Dora 2023/11/14					
DWG NO: N/A							
SHEET 1 of 1		<table border="1"> <tr> <td>GENERAL TOLERANCES</td> <td>ANGLES</td> <td>DA2311090011</td> <td>REV. 1.30</td> </tr> </table>		GENERAL TOLERANCES	ANGLES	DA2311090011	REV. 1.30
GENERAL TOLERANCES	ANGLES	DA2311090011	REV. 1.30				
Unit: mm							