



REV	DESCRIPTION	DATE
3.40	NEW DRAWING FRAME	2023/08/29
3.41	CORRECT INSULATION RESISTANCE UNIT	2024/01/12



RECOMMENDED STRIP LENGTHS

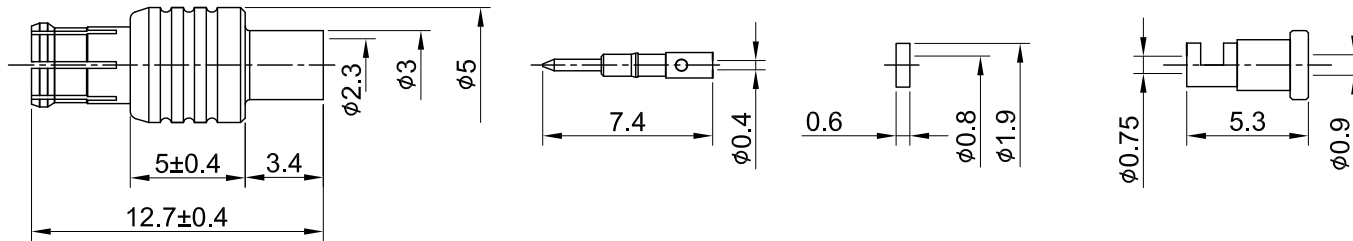

MECHANICAL DATA  
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
FREQUENCY RANGE: DC~6GHz  
IMPEDANCE : 50Ω  
VSWR : 1.3 MAX.  
WORKING VOLTAGE : AC 335V  
WITHSTANDING VOLTAGE : AC 500V  
INSULATION RESISTANCE : 1000 MΩ MIN

06	FERRULE	BRASS	GOLD	1
05	GASKET	TEFLON	NONE	1
04	BODY B	BRASS	GOLD	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY A	Be.Cu	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/01/12	
MCX(M) st. crimp for 0.81		CHK'D BY: Chilli		2024/01/12	
DWG NO. C07AA31081004A		CUST. P/N: N/A		DWG NO: N/A	
SHEET 1 of 1		Unit: mm		DA2312270045	
REV. 3.41		DRAWN BY: Kelly		2024/01/12	
GENERAL TOLERANCES		CHK'D BY: Chilli		2024/01/12	
.X ±0.2		.XX ±0.2		.XXX ±0.2	
ANGLES N/A		DRAWN BY: Kelly		2024/01/12	

