



REV	DESCRIPTION	DATE
1.40	NEW DRAWING FRAME	2023/08/07
1.50	UPDATE RECOMMENDED STRIP LENGTHS	2023/09/06
1.51	CORRECT INSULATION RESISTANCE UNIT	2024/01/12



RECOMMENDED STRIP LENGTHS

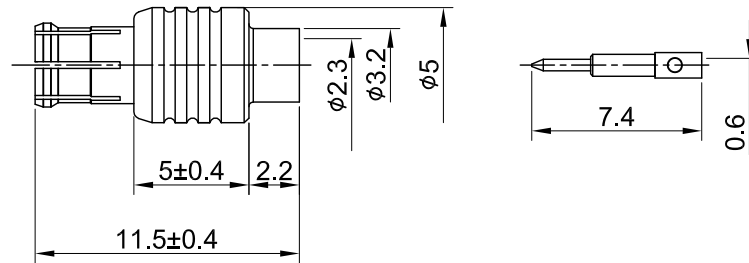

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHZ
IMPEDANCE : 50Ω
VSWR : 1.2 MAX.
WORKING VOLTAGE : AC 335V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 1000 MΩ MIN

04	BODY B	BRASS	GOLD	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY A	Be.Cu	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/01/12	
MCX(M) st. solder for 0.085 cable		CHK'D BY: Chilli		2024/01/12	
DWG NO. C07AA31085014		GENERAL TOLERANCES		REVISION	
CUST. P/N: N/A		.X ±0.2		REV.	
DWG NO: N/A		.XX ±0.2		1.51	
SHEET 1 of 1		.XXX ±0.2		DA2312270049	
Unit: mm		ANGLES N/A			

