


| REV  | DESCRIPTION                   | DATE       |
|------|-------------------------------|------------|
| 1.30 | NEW DRAWING FRAME             | 2023/09/08 |
| 1.40 | CORRECT INSULATION RESISTANCE | 2023/11/15 |

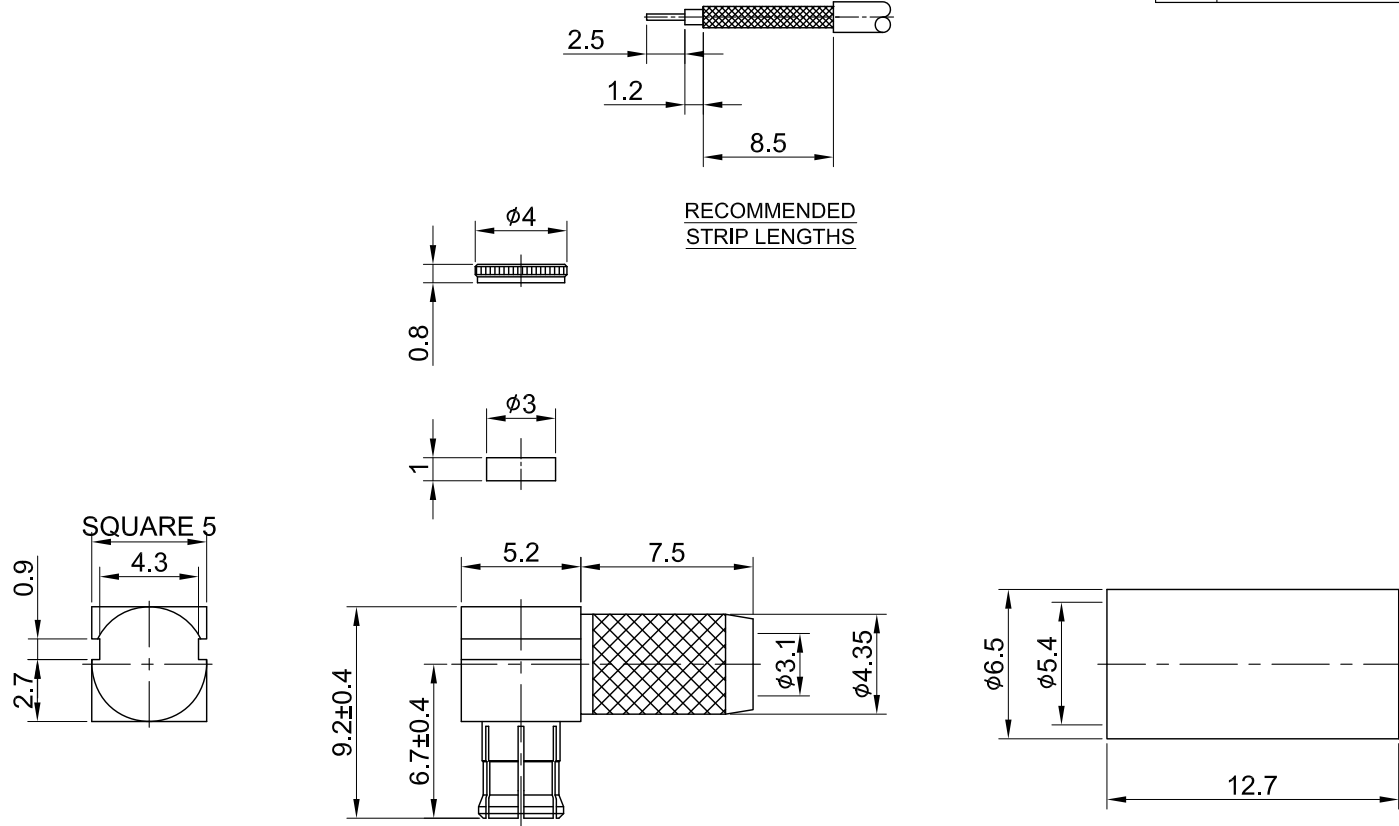

RECOMMENDED STRIP LENGTHS

MECHANICAL DATA  
TEMPERATURE RANGE : -40°C ~ + 85°C

ELECTRICAL DATA  
FREQUENCY RANGE: DC~6GHZ  
IMPEDANCE : 50Ω  
VSWR : 1.5 MAX.  
WORKING VOLTAGE : AC 335V  
WITHSTANDING VOLTAGE : AC 500V  
INSULATION RESISTANCE : 1000 MΩ MIN

|    |              |          |        |      |
|----|--------------|----------|--------|------|
| 07 | FERRULE      | BRASS    | GOLD   | 1    |
| 06 | BODY B       | Be.Cu    | GOLD   | 1    |
| 05 | INSULATOR    | TEFLON   | NONE   | 1    |
| 04 | CENTER PIN   | BRASS    | GOLD   | 1    |
| 03 | BODY A       | BRASS    | GOLD   | 1    |
| 02 | INSULATOR    | POM      | NONE   | 1    |
| 01 | PRESS WASHER | BRASS    | GOLD   | 1    |
| NO | DESCRIPTION  | MATERIAL | FINISH | Q'TY |

| TITLE                          |  | DRAWN BY:                                                            |                 |
|--------------------------------|--|----------------------------------------------------------------------|-----------------|
| MCX(M) ra. crimp type for RG58 |  | Lottie                                                               | 2023/11/15      |
| DWG NO. C07BA3F058A01          |  | CHK'D BY:                                                            | Dora 2023/11/15 |
| CUST. P/N: N/A<br>DWG NO: N/A  |  |                                                                      |                 |
| SHEET 1 of 1 Unit: mm          |  | GENERAL TOLERANCES<br>.X ±0.2<br>.XX ±0.2<br>.XXX ±0.2<br>ANGLES N/A |                 |
|                                |  | DA2311090014 REV. 1.40                                               |                 |