
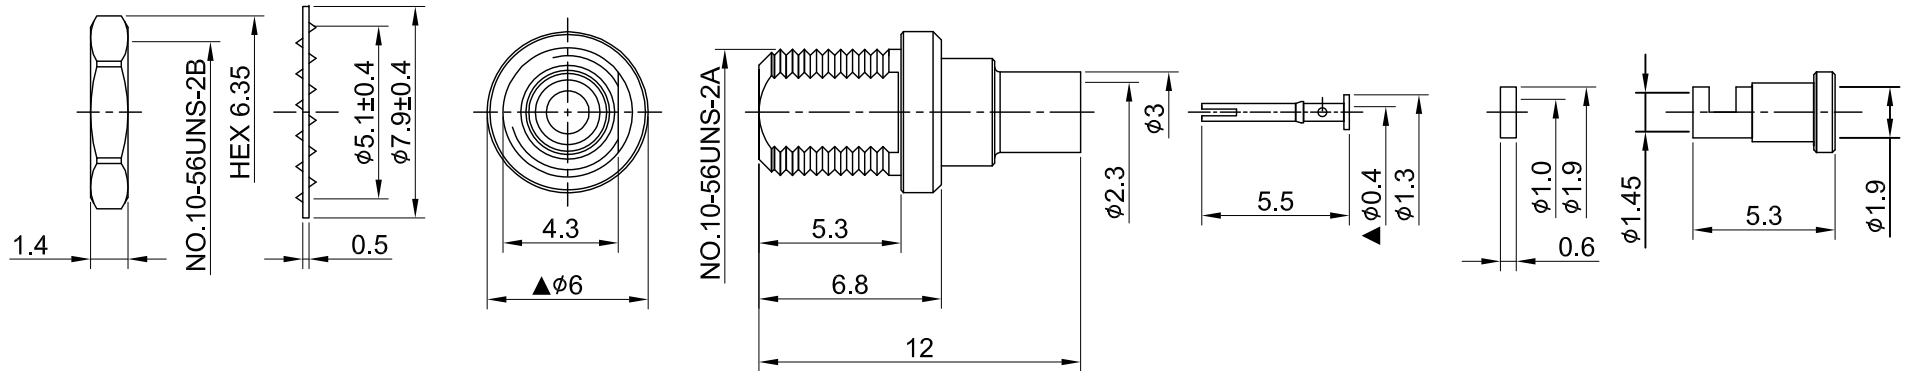


REV	DESCRIPTION	DATE
1.20	ADD DIMENSION $\phi 6$, CHG $\phi 0.4$ W. $\phi 0.5$	2023/07/10
1.30	CORRECT INSULATION RESISTANCE	2023/11/21

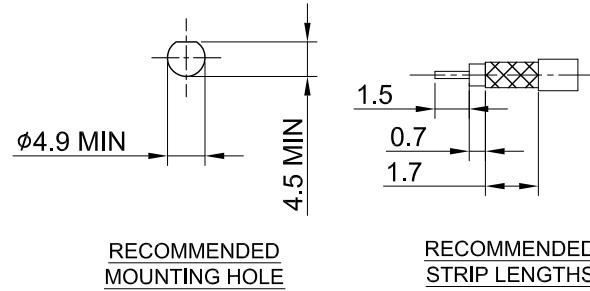

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 170V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 MΩ MIN

07	NUT	BRASS	GOLD	1
06	WASHER	BRASS	GOLD	1
05	FERRULE	BRASS	GOLD	1
04	GASKET	TEFLON	NONE	1
03	CENTER PIN	Be.Cu	GOLD	1
02	BODY	BRASS	GOLD	1
01	INSULATOR	TEFLON	NONE	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:											
MMCX(F) st. bh. for RG178		Lottie	2023/11/21										
DWG NO. C06AB3F178007A		CHK'D BY: Kana	2023/11/21										
CUST. P/N: N/A DWG NO: N/A		<table border="1"> <thead> <tr> <th>GENERAL TOLERANCES</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>.X ±0.2</td> <td></td> </tr> <tr> <td>.XX ±0.2</td> <td></td> </tr> <tr> <td>.XXX ±0.2</td> <td></td> </tr> <tr> <td>ANGLES N/A</td> <td></td> </tr> </tbody> </table>		GENERAL TOLERANCES	ANGLES	.X ±0.2		.XX ±0.2		.XXX ±0.2		ANGLES N/A	
GENERAL TOLERANCES	ANGLES												
.X ±0.2													
.XX ±0.2													
.XXX ±0.2													
ANGLES N/A													
SHEET 1 of 1	Unit: mm	DA2311160034	REV. 1.30										

