
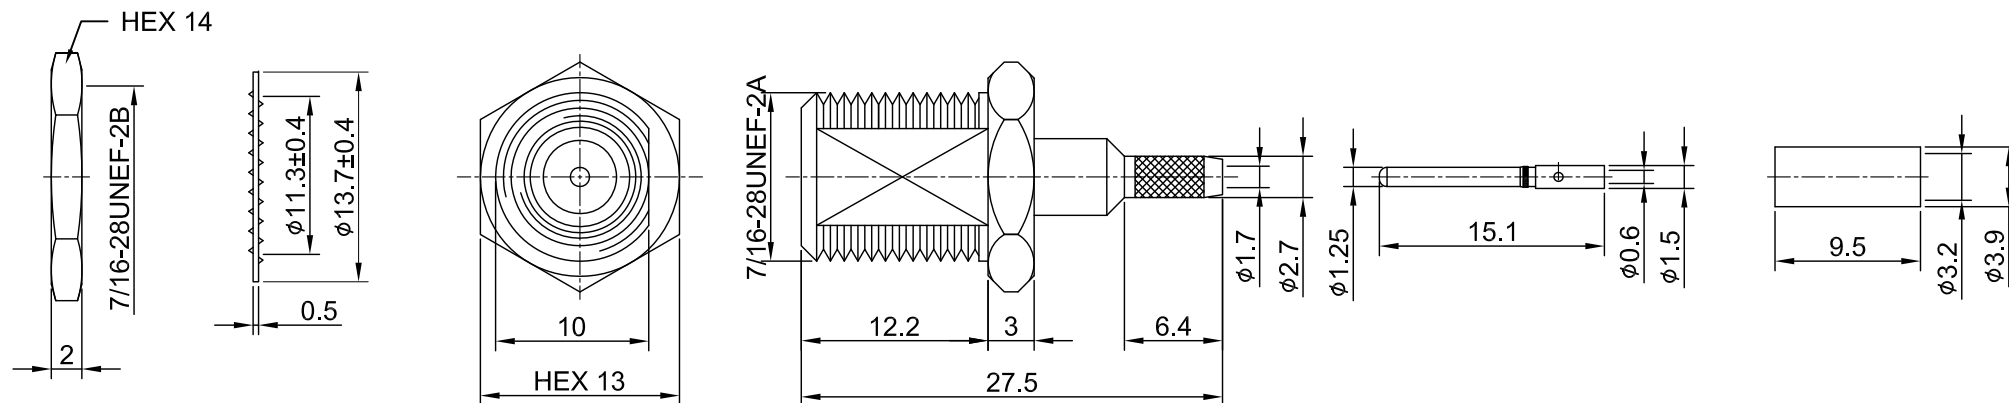


REV	DESCRIPTION	DATE
1.20	CHG PIN L. 15.1 W. 14.7	2016/12/08
1.30	NEW DRAWING FRAME	2024/05/06

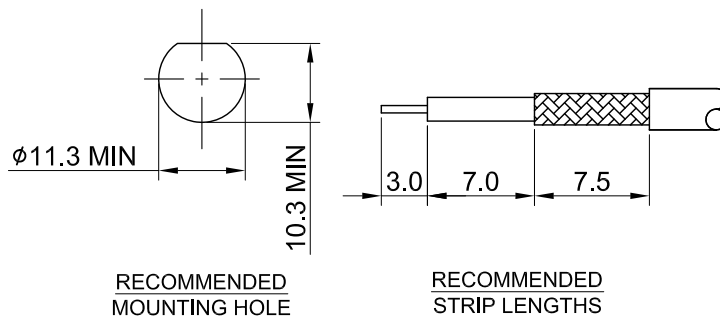

MECHANICAL DATA
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~1GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

06	NUT	BRASS	NICKEL	1
05	WASHER	BRASS	NICKEL	1
04	FERRULE	BRASS	NICKEL	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		DATE
FME(M) bh. crimp type for RG174		Kelly	2024/05/06	
DWG NO.		CHK'D BY:		DATE
C29CB3F174001A		Dora	2024/05/06	
CUST.		GENERAL TOLERANCES		
P/N: N/A		.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		
DWG NO: N/A		DA2405060006		REV.
SHEET	1 of 1	Unit: mm		1.30