




REV	DESCRIPTION	DATE
1.40	CORRECT MATERIAL POM W. DELRIN	2023/06/28
1.41	CORRECT INSULATION RESISTANCE UNIT	2024/08/13

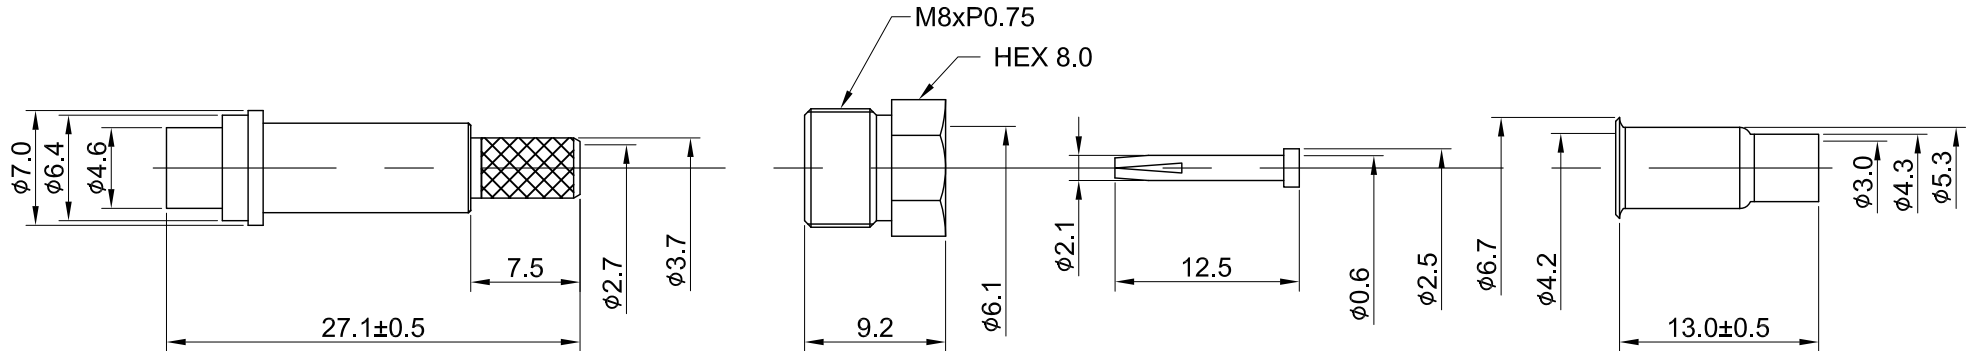


RECOMMENDED STRIP LENGTHS



MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -20°C ~ +85°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~1GHz
 IMPEDANCE : 50Ω
 WORKING VOLTAGE : AC 250V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 5000 MΩ MIN

06	PLASTIC TUBE	POM	WHITE	1
05	PIN	BRASS	GOLD	1
04	FERRULE	BRASS	NICKEL	1
03	NUT	BRASS	NICKEL	1
02	INSULATOR	POM	WHITE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE FME(F) st. crimp for RG174		DWG NO. C30CA37174003			
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X ±0.4 .XX ±0.4 .XXX ±0.4 ANGLES N/A		DRAWN BY: Kelly 2024/08/13 CHK'D BY: Chili 2024/08/13	
SHEET 1 of 1		Unit: mm		DA2408130011 REV. 1.41	