



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2024/02/01



RECOMMENDED STRIP LENGTHS

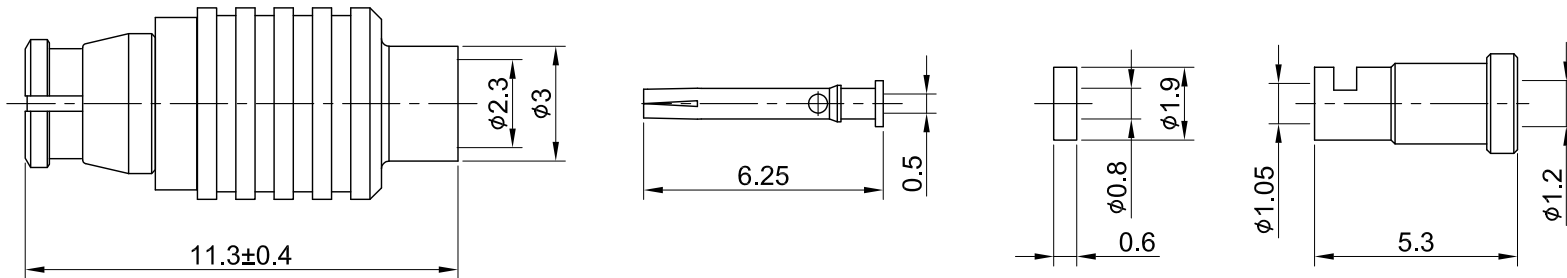

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 335V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 5000 MΩ MIN

07	INSULATOR GASKET	TEFLON	NONE	1
06	SLEEVE	BRASS	GOLD	1
05	CABLE BODY	BRASS	GOLD	1
04	RING	Be.Cu	GOLD	1
03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	Be.Cu	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		SMP(F) st. for 1.13/1.13LL	
DWG NO.		C60AA3F113002B	
CUST. P/N: N/A		DWG NO: N/A	
SHEET 1 of 1		Unit: mm	
GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		DRAWN BY: Kelly 2024/02/01 CHK'D BY: Maria 2024/02/01 REV. 1.00 DA2402010003	

