

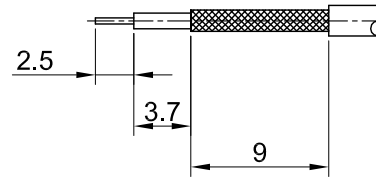
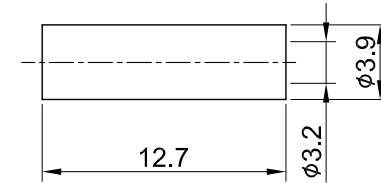


REV	DESCRIPTION	DATE
1.10	CHG BODY L.29.1 W. 29, ADD ORING	2015/07/17
1.20	NEW DRAWING FRAME	2024/05/06
1.21	UPDATE TITLE	2024/08/19



RECOMMENDED STRIP LENGTHS

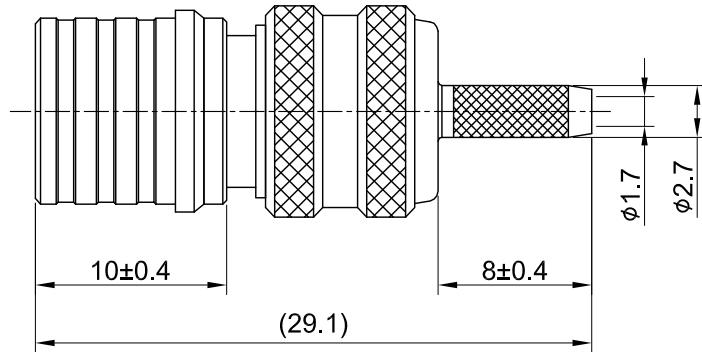

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1000V
INSULATION RESISTANCE : 5000 MΩ MIN

09	O RING	SILICONE RUBBER	RED	1
08	FERRULE	BRASS	NICKEL	1
07	CENTER PIN	BRASS	GOLD	1
06	CABLE BODY	BRASS	NICKEL	1
05	BODY B	BRASS	NICKEL	1
04	INSULATOR	TEFLON	NONE	1
03	PRESS BODY	BRASS	NICKEL	1
02	SHELL	BRASS	NICKEL	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		QMA(M) st. for RG316/RG174	
DWG NO.		C61CA3F174005	
CUST. P/N: N/A		DRAWN BY: Kelly 2024/08/19	
DWG NO: N/A		CHK'D BY: Eileen 2024/08/19	
SHEET 1 of 1		Unit: mm	
Unit: mm		DA2408190004	
Unit: mm		REV. 1.21	



GENERAL TOLERANCES		DRAWN BY: Kelly 2024/08/19	
.X	±0.2	CHK'D BY: Eileen 2024/08/19	
.XX	±0.2	REV. 1.21	
.XXX	±0.2	DA2408190004	
ANGLES	N/A		