




REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2023/06/07
1.01	CORRECT INSULATION RESISTANCE	2024/01/12









DETAIL A



RECOMMENDED MOUNTING HOLE



RECOMMENDED STRIP LENGTHS

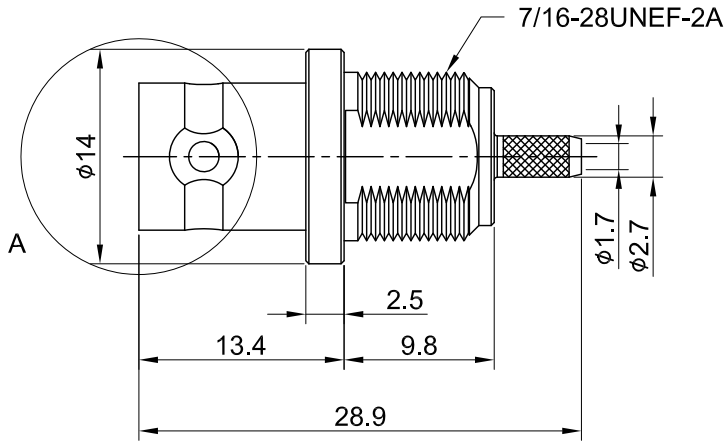

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

DIELECTRICAL DATA  
 FREQUENCY RANGE: DC ~ 4GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

08	NUT	BRASS	NICKEL	1	TITLE BNC(F) bh. front mount for RG174/RG316, Pin in Pin, bh. thread L9.8, 7/16"-28	
07	WASHER	BRASS	NICKEL	1		
06	FERRULE	BRASS	NICKEL	1		
05	BULLET CONTACT	BRASS	GOLD	1	DWG NO. C16CK3F174014B-2	
04	INSULATOR	TEFLON	NONE	1		
03	CENTER PIN	P.BRONZE	GOLD	1	CUST. P/N: N/A DWG NO: N/A	
02	PRESS WASHER	BRASS	NICKEL	1		
01	BODY	BRASS	NICKEL	1		
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	SHEET 1 of 1	Unit: mm



GENERAL TOLERANCES	DRAWN BY: Lottie	2024/01/12
.X ±0.2	CHK'D BY: Dora	2024/01/12
.XX ±0.2		
.XXX ±0.2		
ANGLES N/A		
	REV.	1.01
	DA2401030001	