


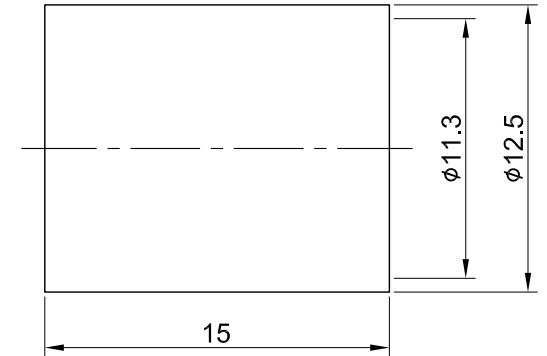


REV	DESCRIPTION	DATE
2.10	CORRECT THE MATERIAL	2020/03/27
3.00	UPDATE DRAWING	2024/10/21

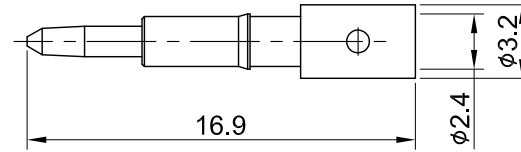

RECOMMENDED STRIP LENGTHS

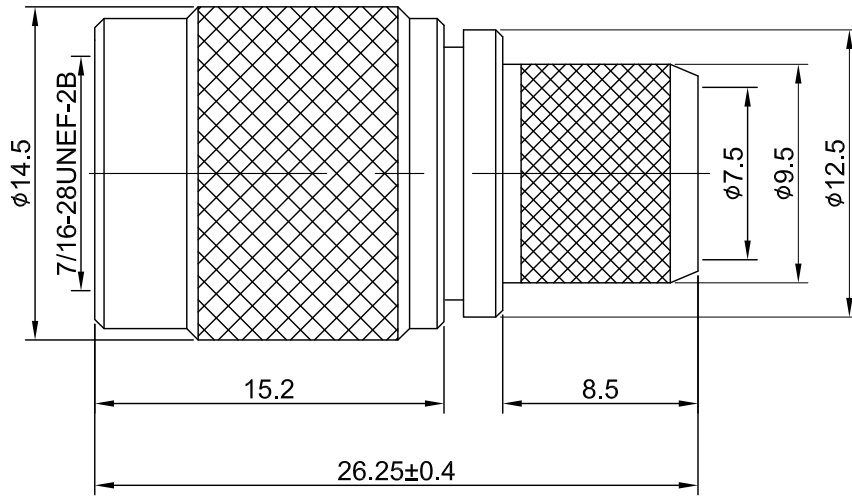

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHZ
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

07	FERRULE	BRASS	NICKEL	1
06	BODY	BRASS	NICKEL	1
05	INNER RETAINING RING	BRASS	NONE	1
04	GASKET	SILICONE RUBBER	RED	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	SHELL	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/10/21	
TNC(M) st. crimp type for RG213/RG214		CHK'D BY: Chilli		2024/10/21	
DWG NO. C17CA3F213002		REVISION		REV. 3.00	
CUST. P/N: N/A		DWG NO: N/A		DA2410180006	
SHEET 1 of 1		Unit: mm			



GENERAL TOLERANCES		DRAWN BY: Kelly		2024/10/21	
.X	±0.2	CHK'D BY: Chilli		2024/10/21	
.XX	±0.2	REVISION		REV. 3.00	
.XXX	±0.2	DA2410180006			
ANGLES	N/A				