


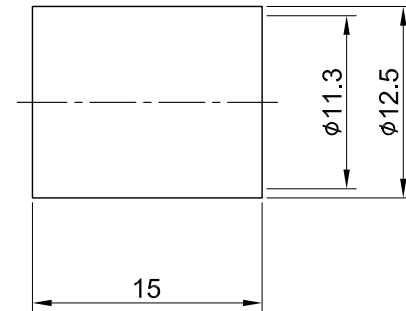


REV	DESCRIPTION	DATE
3.00	MODIFIED DESIGN (PIN DESIGN/ BODY LENGTH/ STRIP DIM/ BOM)	2021/10/01
3.10	NEW DRAWING FRAME	2024/04/09
3.11	CORRECT VSWR	2024/10/21

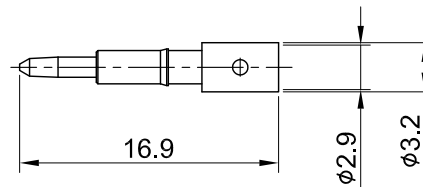

RECOMMENDED STRIP LENGTHS

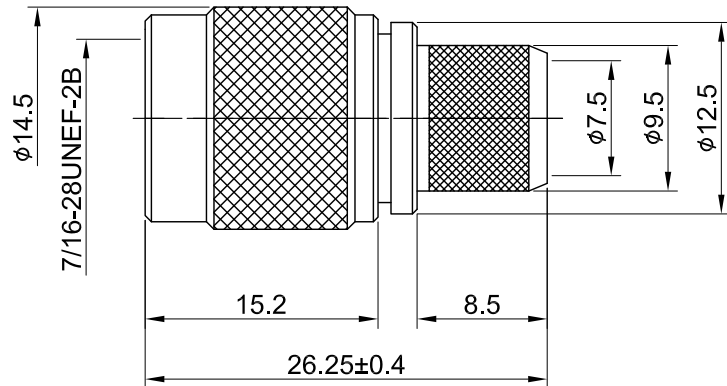

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

07	FERRULE	BRASS	NICKEL	1
06	SHELL	BRASS	NICKEL	1
05	INNER RETAINING RING	BRASS	NONE	1
04	GASKET	SILICONE RUBBER	RED	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/10/21
TNC(M) st. crimp type for LMR400		CHK'D BY: Chilli		2024/10/21
DWG NO. C17CA3FL40002		REVISIONS		
CUST. P/N: N/A		DA2410210001		3.11
DWG NO: N/A				
SHEET 1 of 1		Unit: mm		



GENERAL TOLERANCES		REVISIONS	
.X	±0.2	DA2410210001	3.11
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A		