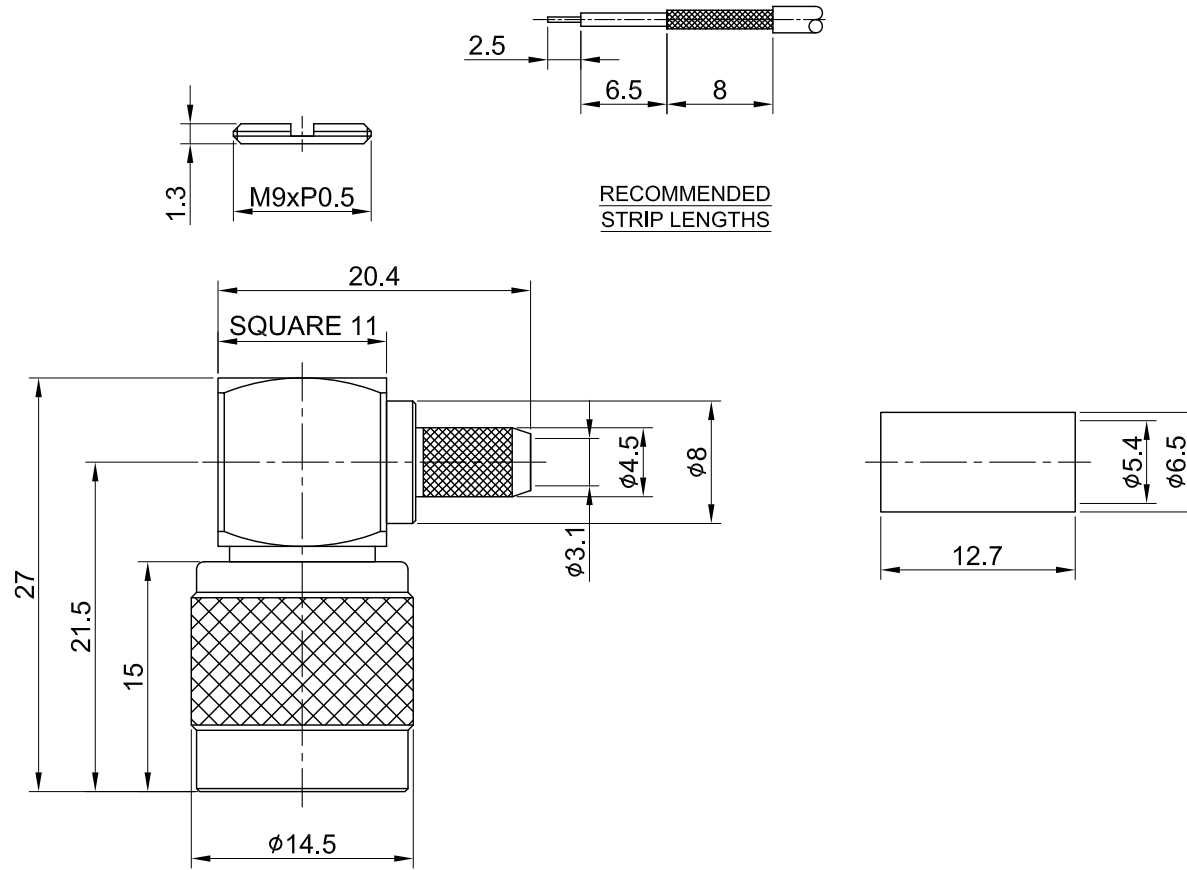




| REV | DESCRIPTION | DATE |
|------|------------------------------------|------------|
| 1.30 | NEW DRAWING FRAME | 2023/06/13 |
| 1.31 | CORRECT INSULATION RESISTANCE UNIT | 2023/12/21 |



| | | | | |
|----|----------------------|-----------------|--------|------|
| 10 | FERRULE | BRASS | NICKEL | 1 |
| 09 | PIN | BRASS | GOLD | 1 |
| 08 | INSULATOR | TEFLON | NONE | 1 |
| 07 | SHELL | BRASS | NICKEL | 1 |
| 06 | GASKET | SILICONE RUBBER | RED | 1 |
| 05 | INNER RETAINING RING | BRASS | NICKEL | 1 |
| 04 | WASHER | BRASS | NICKEL | 1 |
| 03 | BODY B | BRASS | NICKEL | 1 |
| 02 | BODY A | BRASS | NICKEL | 1 |
| 01 | NUT | BRASS | NICKEL | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | Q'TY |

| | | |
|---------------------------|--------|---|
| TITLE | |  |
| TNC(M) ra. crimp for RG58 | | |
| DWG NO. | | GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A |
| C17DA3F058A04 | | |
| CUST. P/N: N/A | | DRAWN BY: Kelly 2023/12/21 CHK'D BY: Eileen 2023/12/21 |
| DWG NO: N/A | | |
| SHEET | 1 of 1 |  REV. 1.31 |
| Unit: | mm | DA2312200029 |

MECHANICAL DATA
 TEMPERATURE RANGE : -65°C ~ + 165°C

DIELECTRICAL DATA
 FREQUENCY RANGE: DC~3GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1500V
 INSULATION RESISTANCE : 5000 MΩ MIN