


REV	DESCRIPTION	DATE
1.11	CORRECTED FULL MATERIAL NAME SILICON RUBBER	2016/12/02
1.20	NEW DRAWING FRAME	2024/01/18

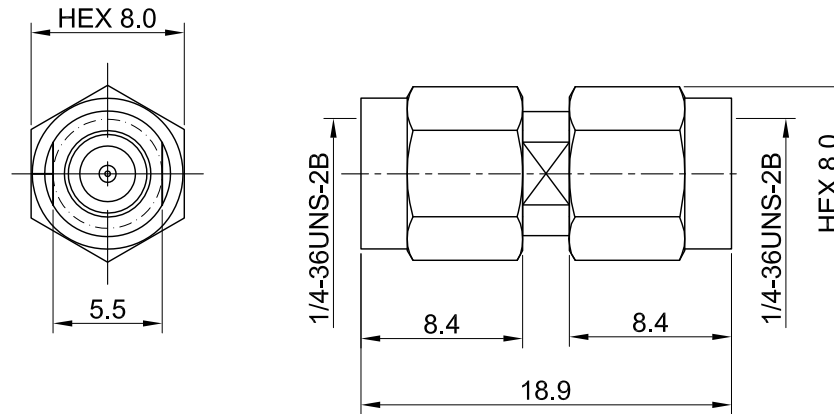


MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~18GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1000V
INSULATION RESISTANCE : 5000 MΩ MIN

06	C-RING	Be.Cu	GOLD	1
05	SHELL	STAINLESS STEEL	PASSTIVATED	1
04	GASKET	SILICONE RUBBER	NONE	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	PTFE	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		CHK'D BY:		REVISION	
SMA(M) to SMA(M) Adaptor (Gold) DC~18GHz		Kelly		David		2024/01/18	
DWG NO. C0A00310101-02		DRAWN BY:		CHK'D BY:		REV.	
CUST. P/N: N/A DWG NO: N/A		DRAWN BY:		CHK'D BY:		REV.	
SHEET 1 of 1		Unit: mm		DA2401110013		1.20	



GENERAL TOLERANCES

.X	±0.2
.XX	±0.2
.XXX	±0.2
ANGLES	N/A

DRAWN BY: Kelly 2024/01/18
CHK'D BY: David 2024/01/18

