


| REV | DESCRIPTION | DATE |
|------|-------------------|------------|
| 1.00 | INITIAL DESIGN | 2014/10/15 |
| 1.10 | NEW DRAWING FRAME | 2024/01/02 |

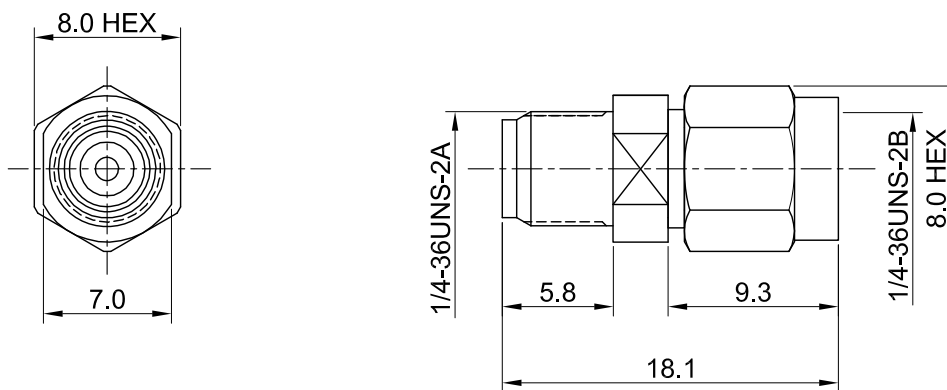

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~10GHz
 IMPEDANCE : 50Ω
 VSWR : 1.3 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

| | | | | |
|----|-------------|-----------------|--------|------|
| 06 | C-RING | Be.Cu | NONE | 1 |
| 05 | SHELL | BRASS | NICKEL | 1 |
| 04 | GASKET | SILICONE RUBBER | NONE | 1 |
| 03 | CENTER PIN | Be.Cu | GOLD | 1 |
| 02 | INSULATOR | TEFLON | NONE | 1 |
| 01 | BODY | BRASS | NICKEL | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | Q'TY |

| TITLE | | DRAWN BY: | | CHK'D BY: | |
|----------------------------------|--|--|--|------------|--|
| SMA Male to SMA Female (Ni) | | Kelly | | Maria | |
| DWG NO. C0A00310102-07 | | 2024/01/02 | | 2024/01/02 | |
| CUST. P/N: N/A DWG NO: N/A | | GENERAL TOLERANCES | | REV. | |
| SHEET 1 of 1 Unit: mm | | .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A | | 1.10 | |
| | | DA2312270020 | | | |

