


REV	DESCRIPTION	DATE
1.10	ADD NOTE	2018/08/16
1.20	NEW DRAWING FRAME	2024/03/27

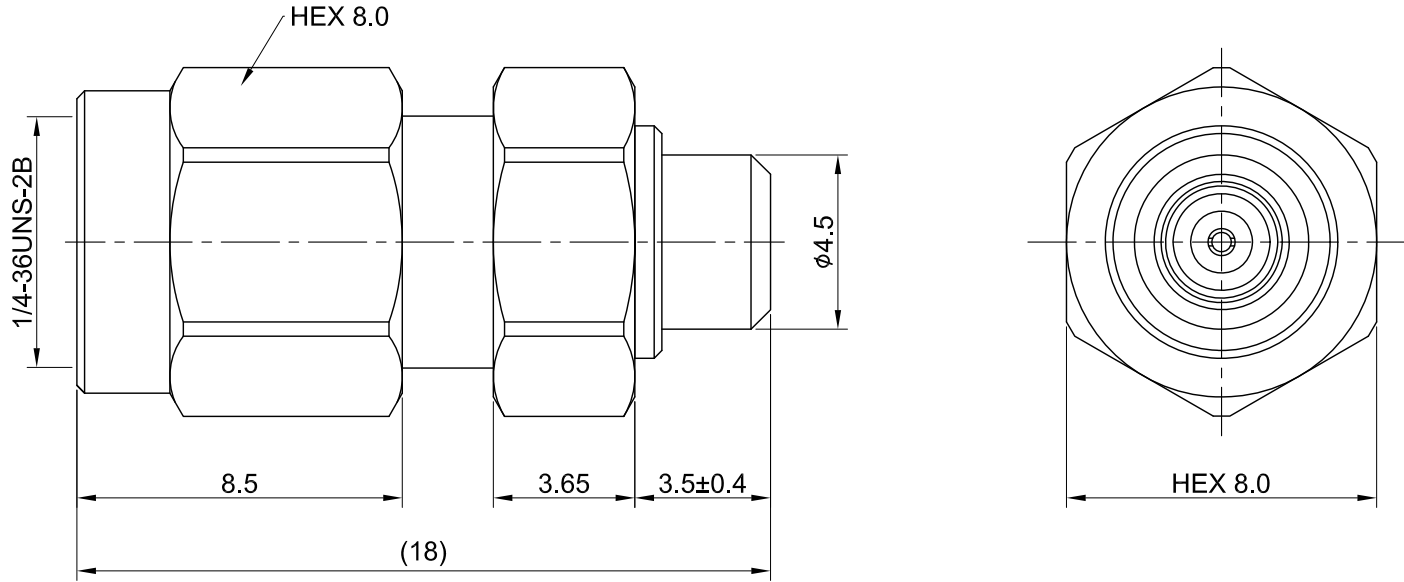

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~8GHZ  
 IMPEDANCE : 50Ω  
 VSWR : 1.3 MAX.  
 WORKING VOLTAGE : AC 170V  
 WITHSTANDING VOLTAGE : AC 500V  
 INSULATION RESISTANCE : 1000 MΩ MIN

08	BODY B	BRASS	GOLD	1	TITLE SMA(M) to MMCX(F) adaptor, straight type
07	INSULATOR B	TEFLON	NONE	1	
06	BODY A	BRASS	GOLD	1	DWG NO. C0A003F0106-01
05	INNER RETAINING RING	STAINLESS	NONE	1	
04	GASKET	SILICONE RUBBER	RED	1	CUST. P/N: N/A DWG NO: N/A
03	CENTER PIN	P.BRONZE	GOLD	1	
02	INSULATOR A	TEFLON	NONE	1	SHEET 1 of 1 Unit: mm
01	SHELL	BRASS	GOLD	1	
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	



GENERAL TOLERANCES	DRAWN BY: Kelly	2024/03/27
.X ±0.2	CHK'D BY: Dora	2024/03/27
.XX ±0.2		
.XXX ±0.2		
ANGLES N/A		
	DA2403110011	REV. 1.20