


REV	DESCRIPTION	DATE
1.20	CORRECT MATERIAL NAME SILICON RUBBER W. SILICON	2020/11/27
1.30	NEW DRAWING FRAME	2024/03/13

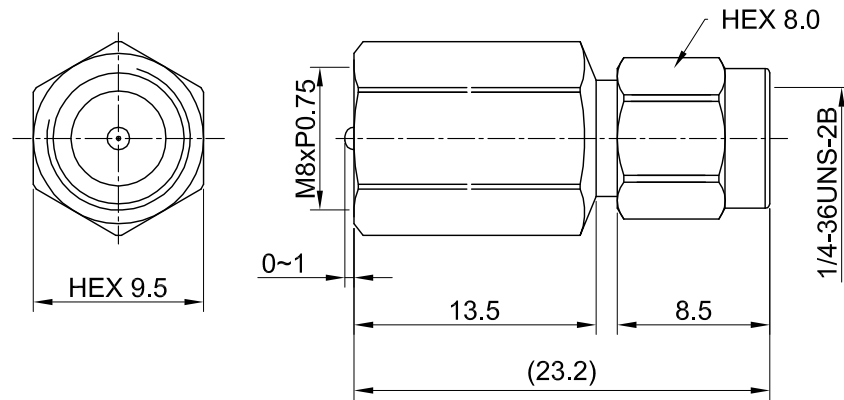

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~2GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1000V
INSULATION RESISTANCE : 5000 MΩ MIN

06	SHELL	BRASS	NICKEL	1
05	GASKET	SILICONE RUBBER	NONE	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY:		CHK'D BY:		REVISION	
SMA(M) to FME(M) Adaptor		Kelly	2024/03/13	Kana	2024/03/13	REV. 2.10	
DWG NO. C0A003F0129-01		GENERAL TOLERANCES		DA2401190016			
CUST. P/N: N/A DWG NO: N/A		.X ±0.2	.XX ±0.2	ANGLES N/A			
SHEET 1 of 1	Unit: mm						

