


REV	DESCRIPTION	DATE
1.01	CHG BODY FINISH GOLD w. NICKEL	2013/09/04
1.10	ADD DIM 5±0.15, ADD TOLERANCE	2023/12/27

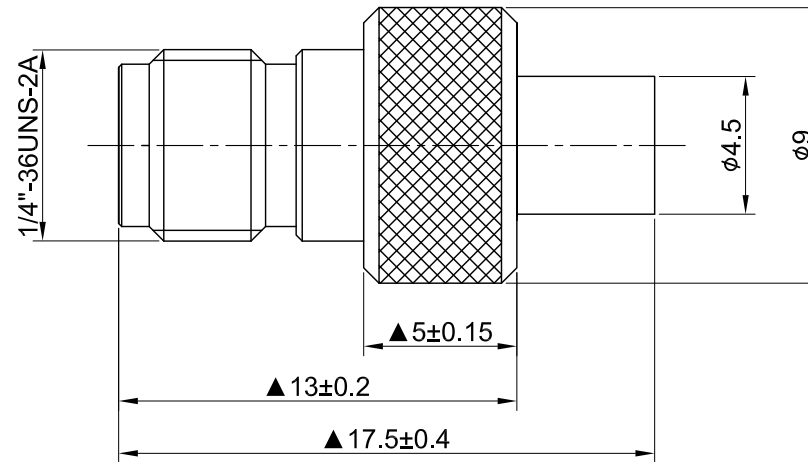



MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC ~ 6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.2 MAX.
 WORKING VOLTAGE : AC 335V
 WITHSTANDING VOLTAGE : AC 500V
 INSULATION RESISTANCE : 1000 MΩ MIN

TITLE
 SMA Straight Jack to MCX Straight Jack Adaptor

05	BODY	BRASS	GOLD	1
04	INSULATOR	TEFLON	NONE	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

DWG NO.	C0A003F0208-01
CUST. P/N:	N/A
DWG NO:	N/A
SHEET	1 of 1
Unit:	mm

	GENERAL TOLERANCES	DRAWN BY: Lottie	2023/12/27
	.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	CHK'D BY: Kana	2023/12/27
		REV.	1.10
DA2312190016			