




REV	DESCRIPTION	DATE
A	INITIAL DESIGN	2011/02/09
1.00	CORRECT INNER RETAINING RING MATERIAL	2024/03/19

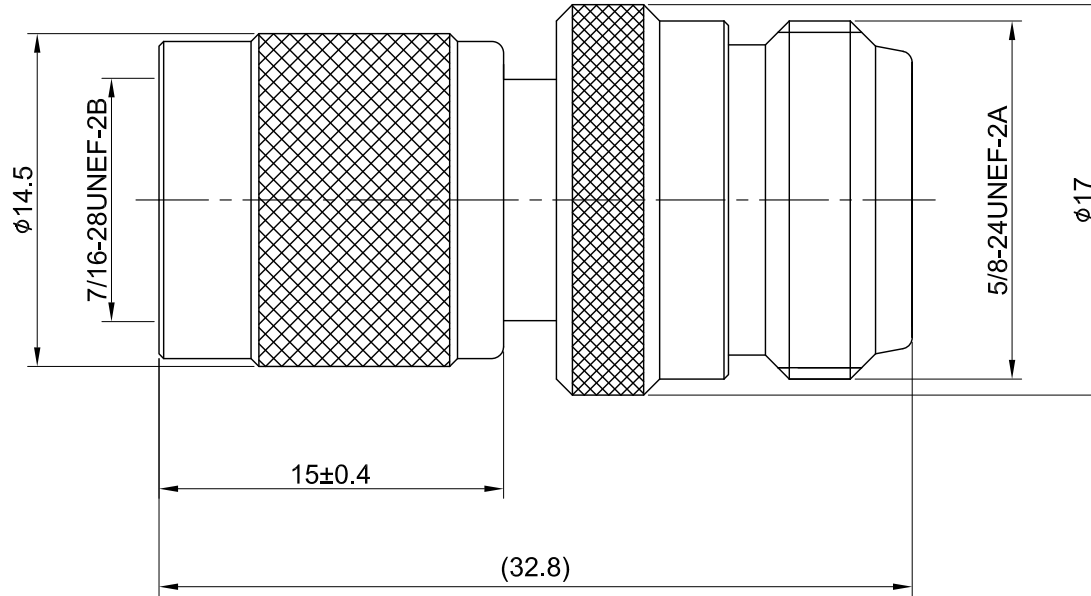

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~4GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.2 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1500V
 INSULATION RESISTANCE : 5000 MΩ MIN

09	RETAINING HOLDER	BRASS	NICKEL	1
08	INSULATOR B	TEFLON	NONE	1
07	SHELL	BRASS	NICKEL	1
06	INSULATOR A	TEFLON	NONE	1
05	INNER RETAINING RING	BRASS	NONE	1
04	GASKET	SILICONE RUBBER	RED	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	WASHER	BRASS	NICKEL	1
01	BODY A	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/03/19											
TNC(M) st. to N(F) st. adaptor		CHK'D BY: Kana		2024/03/19											
DWG NO. C0A003F1728-01				REV.											
CUST. P/N: N/A		<table border="1"> <tr> <td>GENERAL TOLERANCES</td> <td></td> </tr> <tr> <td>.X</td> <td>±0.2</td> </tr> <tr> <td>.XX</td> <td>±0.2</td> </tr> <tr> <td>.XXX</td> <td>±0.2</td> </tr> <tr> <td>ANGLES</td> <td>N/A</td> </tr> </table>		GENERAL TOLERANCES		.X	±0.2	.XX	±0.2	.XXX	±0.2	ANGLES	N/A		1.10
GENERAL TOLERANCES															
.X	±0.2														
.XX	±0.2														
.XXX	±0.2														
ANGLES	N/A														
DWG NO: N/A	SHEET 1 of 1	Unit: mm	DA2401310020												