




REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2014/04/02
1.10	NEW DRAWING FRAME	2024/12/30

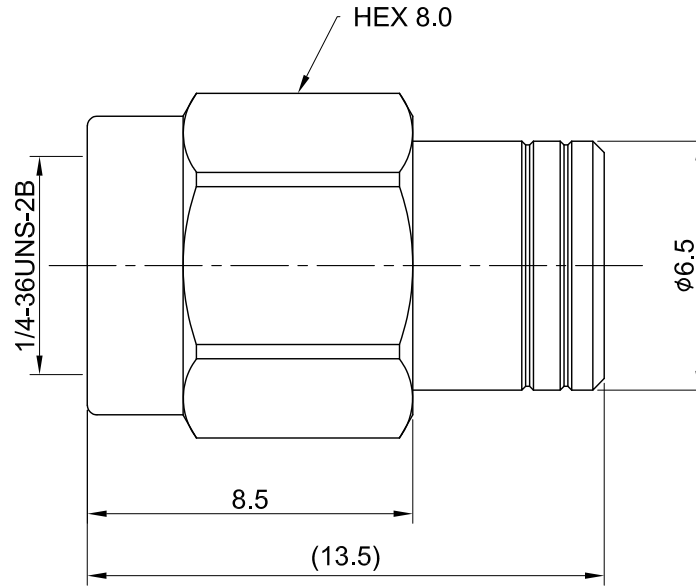

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~18GHz
IMPEDANCE : 50Ω
VSWR : 1.2 MAX.
WORKING VOLTAGE : AC 500V
INSULATION RESISTANCE : 5000 MΩ MIN

09	COVER	BRASS	GOLD	1
08	BODY B	BRASS	GOLD	1
07	RESISTANCE	NONE	NONE	1
06	CENTER PIN	BRASS	GOLD	1
05	BODY A	BRASS	GOLD	1
04	INSULATOR	TEFLON	NONE	1
03	INNER RETAINING RING	STAINLESS STEEL	NONE	1
02	GASKET	SILICONE RUBBER	RED	1
01	SHELL	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		SMA(M) st. terminator, 50ohm, 2W, 18GHz, Gold	
DWG NO.		C99AA3F14	
CUST. P/N: N/A		DRAWN BY: Kelly 2024/12/30	
DWG NO: N/A		CHK'D BY: Mindy 2024/12/30	
SHEET 1 of 1			
Unit: mm			
		REV. 1.10	
		DA2412300006	

GENERAL TOLERANCES	
.X	±0.2
.XX	±0.2
.XXX	±0.2
ANGLES	N/A