


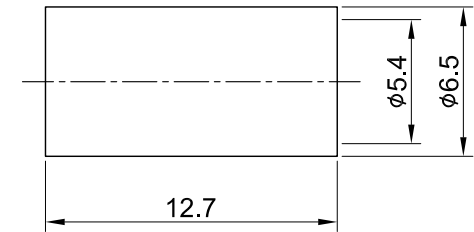


REV	DESCRIPTION	DATE
2.00	UPDATED DESIGN	2022/12/14
2.10	NEW DRAWING FRAME	2024/01/04

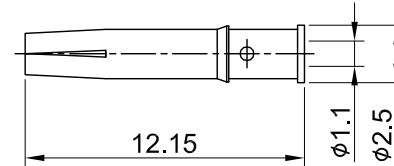

RECOMMENDED STRIP LENGTHS

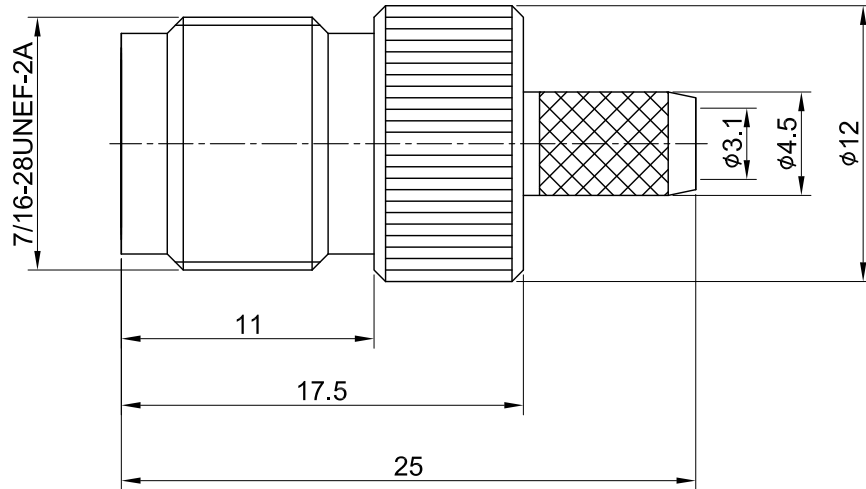

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1500V
 INSULATION RESISTANCE : 5000 MΩ MIN


TITLE
 TNC(F) st. crimp for RG58

05	FERRULE	BRASS	NICKEL	1
04	PRESS WASHER	BRASS	NICKEL	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

DWG NO.
 C18CA3F058A08A


CUST.
 P/N: N/A
 DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES
 .X ±0.2
 .XX ±0.2
 .XXX ±0.2
 ANGLES N/A

DRAWN BY: Kelly 2024/01/04
 CHK'D BY: Eileen 2024/01/04

 REV.
 DA2401040016 2.10