
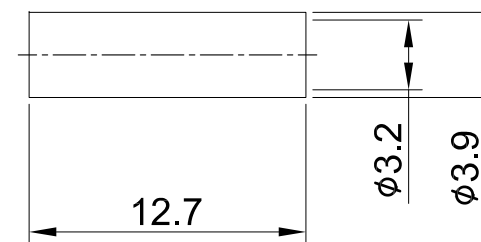

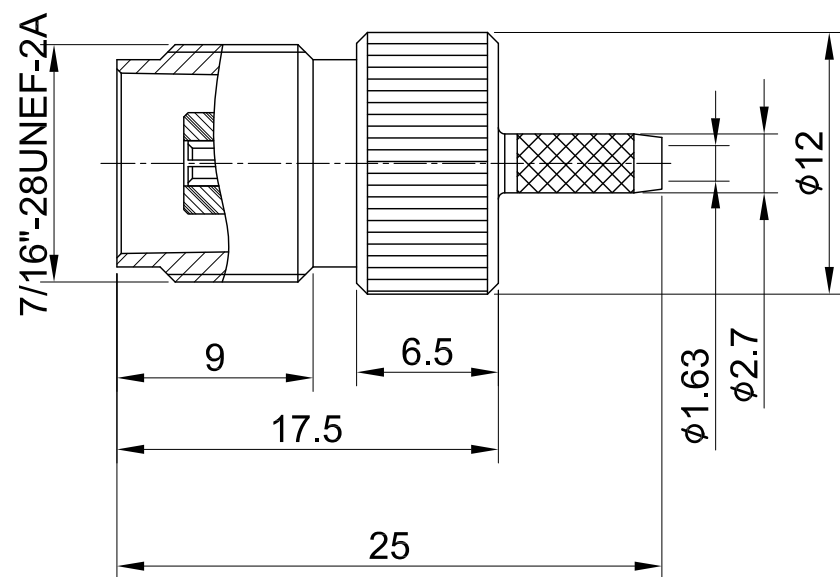


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2010/05/07
1.10	CHG DIM $\phi 1.63$ w. $\phi 1.7$, CHG strip DIM 2.5/1.8/8 w. 2.5/1.6/8	2018/04/24
1.20	Chg $\phi 1.7/ 1.6$ w. $\phi 1.63/ 1.8$	2021/09/27
1.30	NEW DRAWING FRAME	2025/01/22

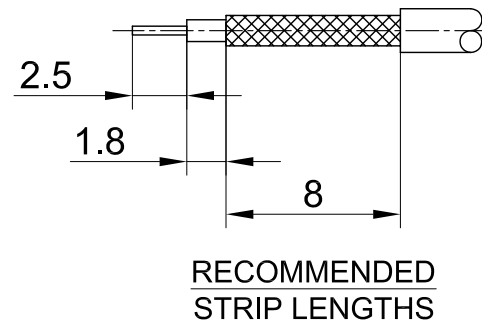

MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1500V
 INSULATION RESISTANCE : 5000 MΩ MIN

NO	DESCRIPTION	MATERIAL	FINISH	Q'TY
07	PRESS WASHER	BRASS	NICKEL	1
06	PIN	BRASS	GOLD	1
05	INSULATOR	TEFLON	NONE	1
04	CENTER CONTACT	Be.Cu	GOLD	1
03	BODY	BRASS	NICKEL	1
02	BULLET CONTACT	BRASS	GOLD	1
01	FERRULE	BRASS	NICKEL	1

TITLE TNC(F) st. crimp for RG174		
DWG NO. C18CA3F174008D		
CUST. P/N: N/A DWG NO: N/A		
SHEET 1 of 1		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A
Unit: mm		DRAWN BY: Oscar 2025/01/22 CHK'D BY: Chili 2025/01/22 REV. 1.30 DA2501220011