


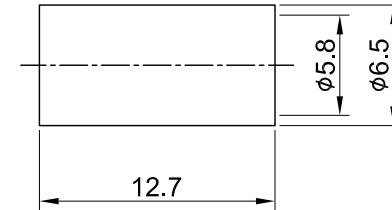


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2012/02/13
1.10	CHG $\phi 1.1$ W. $\phi 1.0$	2023/12/28



RECOMMENDED STRIP LENGTHS

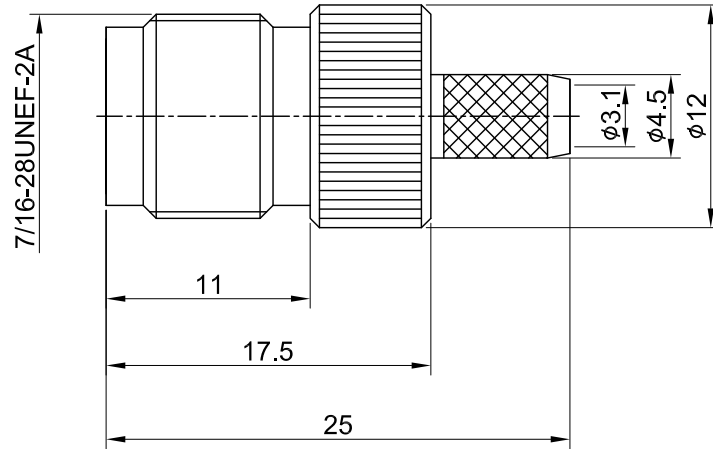

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

05	FERRULE	BRASS	NICKEL	1
04	PRESS WASHER	BRASS	NICKEL	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2023/12/28	
TNC(F) st. crimp type for RG223/RG142/RG400		CHK'D BY: Eileen		2023/12/28	
DWG NO. C18CA3F223008B		REV.		1.10	
CUST. P/N: N/A		DA2312280019			
DWG NO: N/A					
SHEET 1 of 1		Unit: mm			



GENERAL TOLERANCES	
.X	±0.2
.XX	±0.2
.XXX	±0.2
ANGLES	N/A