




REV	DESCRIPTION	DATE
2.11	ADD ORING COLOR, CORRECT FULL MATERIAL NAME SILICONE RUBBER	2021/02/18
2.20	NEW DRAWING FRAME	2024/10/08



RECOMMENDED MOUNTING HOLE



RECOMMENDED STRIP LENGTHS

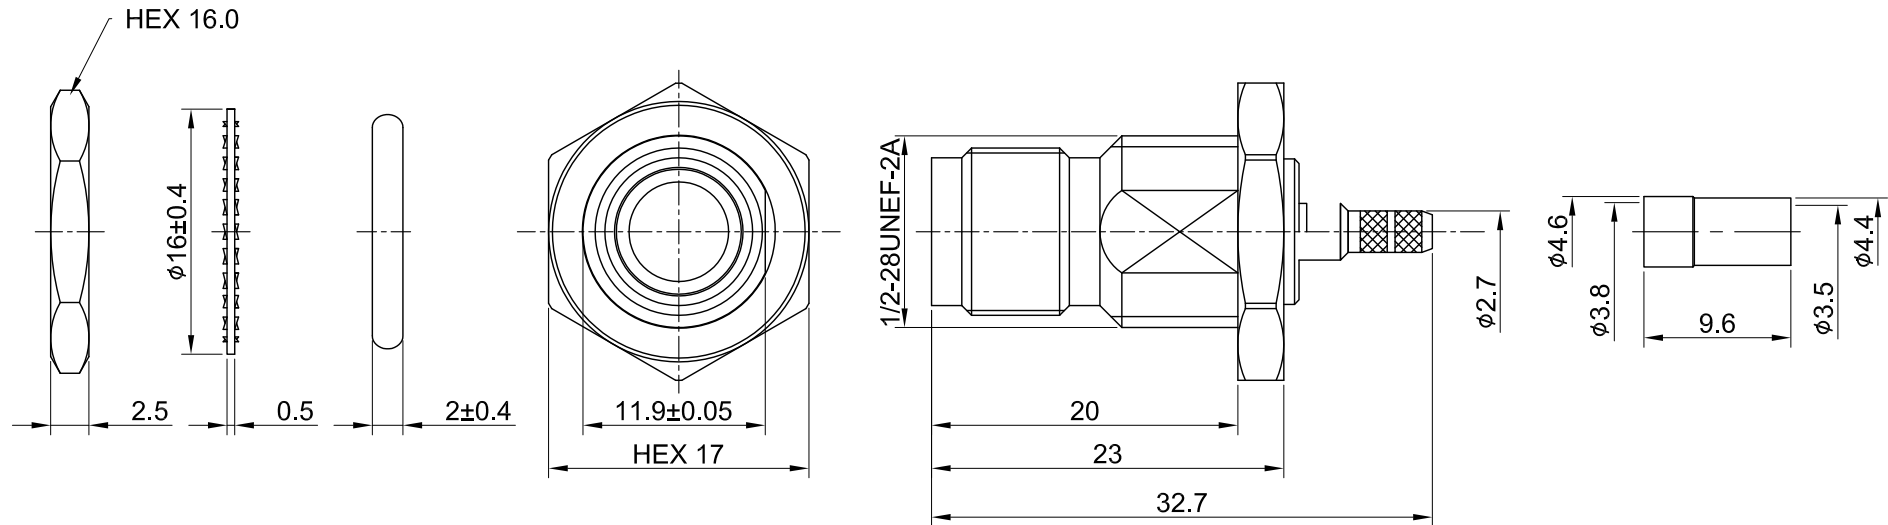

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~3GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.3MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

10	FERRULE	BRASS	NICKEL	1
09	PIN	PHOS BRONZE	GOLD	1
08	BARREL	BRASS	NICKEL	1
07	GASKET	SILICONE RUBBER	NONE	1
06	INSULATOR B	TEFLON	NONE	1
05	INSULATOR A	TEFLON	NONE	1
04	BODY	BRASS	NICKEL	1
03	GASKET A	SILICONE RUBBER	BLACK	1
02	WASHER	STAINLESS STEEL	NONE	1
01	NUT	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/10/08
TNC(F) bh. wOring for RD316, 5psi		CHK'D BY: Maria		2024/10/08
DWG NO. C18CDWS316D03V		GENERAL TOLERANCES		
CUST. P/N: N/A DWG NO: N/A		.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		
SHEET 1 of 1	Unit: mm	DA2410080012		REV. 2.20

