




REV	DESCRIPTION	DATE
2.02	UPDATE TITLE, ADD MOUNTING HOLE	2019/03/29
2.10	NEW DRAWING FRAME, ADD STRIP LENGTHS, CHG 12.1 W. 12.0, WASHER & ORING ADD TOLERANCE	2024/11/15
2.11	DRAW THE GROOVE LOCATION	2025/02/27



RECOMMENDED MOUNTING HOLE



RECOMMENDED STRIP LENGTHS

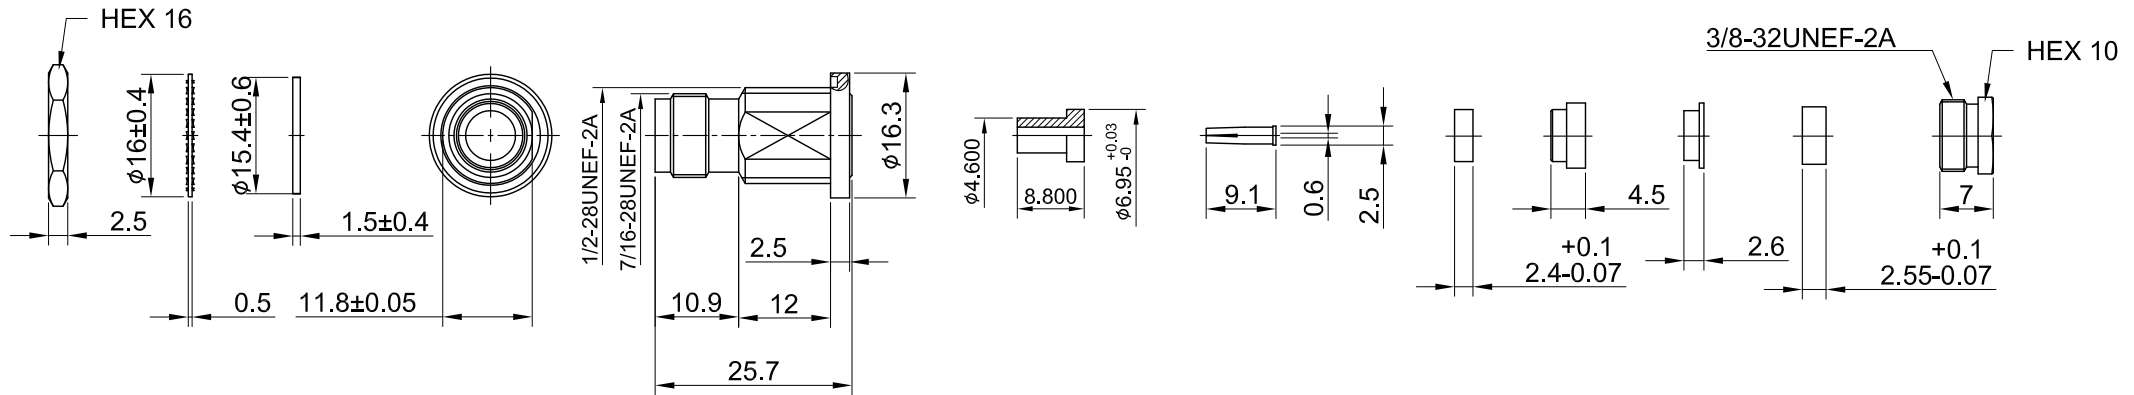

11	NUT B	BRASS	NICKEL	1
10	NUT A	BRASS	NICKEL	1
09	WASHER	STAINLESS STEEL	NICKEL	1
08	SLEEVE B	BRASS	NICKEL	1
07	SLEEVE A	BRASS	NICKEL	1
06	GASKET B	SILICONE RUBBER	RED	1
05	GASKET A	SILICONE RUBBER	RED	1
04	O RING	SILICONE RUBBER	RED	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE
TNC(F) bh. wOring, clamp type for RG174/RG316, 5psi

DWG NO.
C18CDWS174011

CUST.
P/N: N/A
DWG NO: N/A

SHEET 1 of 1 Unit: mm

GENERAL TOLERANCES
.X ±0.2
.XX ±0.2
.XXX ±0.2
ANGLES N/A

DRAWN BY: Oscar 2025/02/27
CHK'D BY: Mindy 2025/02/27

REV. 2.11

DA2410290010

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~3GHZ
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1000V
INSULATION RESISTANCE : 5000 MΩ MIN