


REV	DESCRIPTION	DATE
1.40	CHG $\phi 1.1/6.5$ W. $\phi 1.25/5$ , MODIFY CABLE STRIPPING DIM	2021/02/26
1.50	NEW DRAWING FRAME	2024/10/18

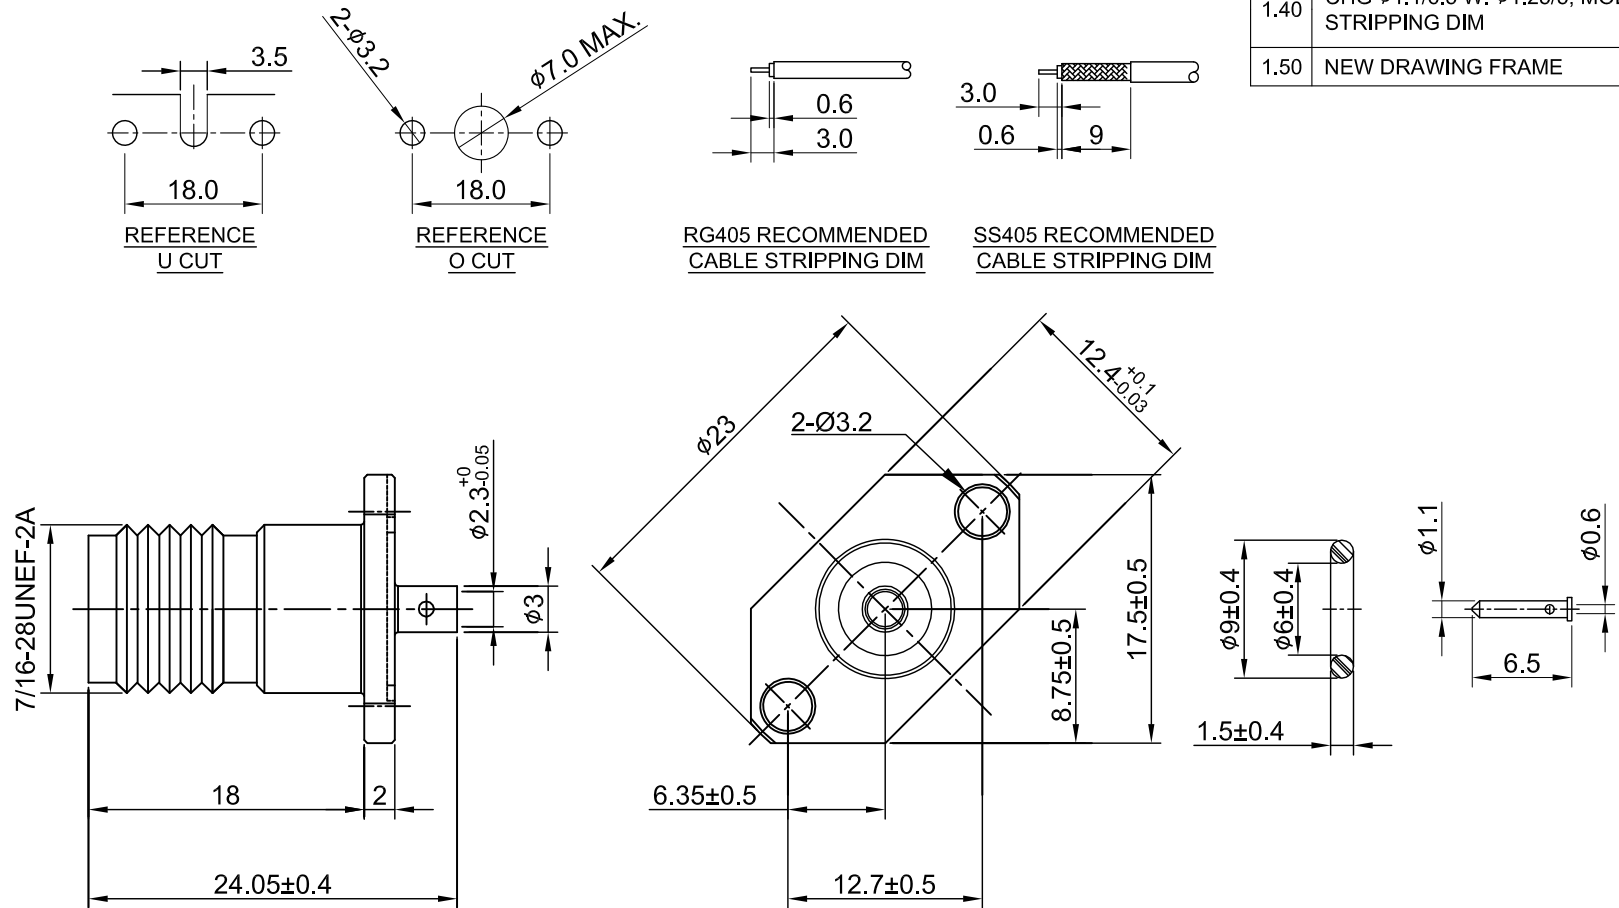

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHZ  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

10	BULLET CONTACT	BRASS	GOLD	1
09	O RING B	SILICONE RUBBER	RED	1
08	O RING A	SILICONE RUBBER	RED	1
07	CENTER CONTACT	Be.Cu	GOLD	1
06	BODY B	BRASS	NICKEL	1
05	INSULATOR B	TEFLON	NONE	1
04	GASKET	SILICONE RUBBER	RED	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY A	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE  
 TNC(F) 2 hole panel wOring, pin in pin for RG405/SS405/.085 cable, 5psi, 6GHz

DWG NO.  
 C18CF3F085027T

CUST.  
 P/N: N/A  
 DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES	DRAWN BY: Kelly	2024/10/18
.X ±0.2	CHK'D BY: Chili	2024/10/18
.XX ±0.2		
.XXX ±0.2		
ANGLES N/A		
	DA2410180007	REV. 1.50