
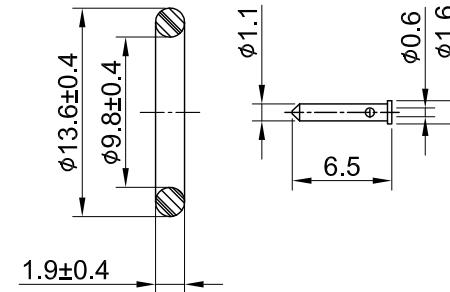
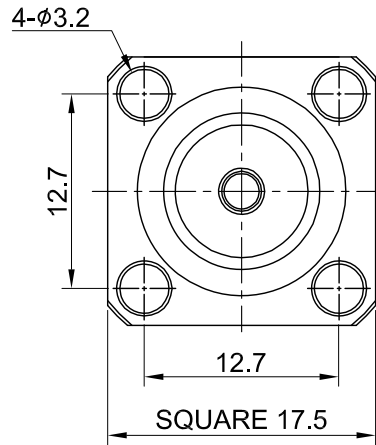
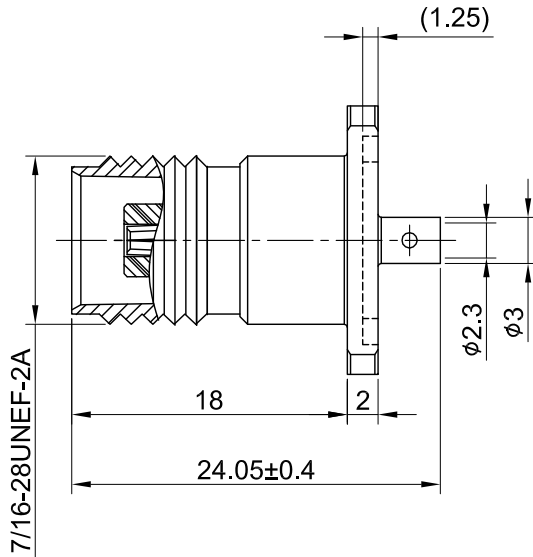


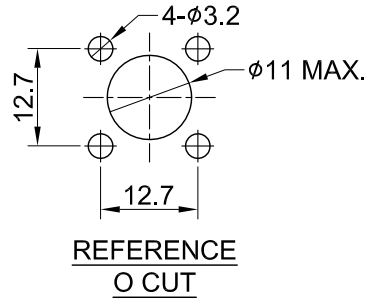


REV	DESCRIPTION	DATE
1.40	ADD DIMENSION $\phi 1.6$	2022/03/21
1.50	NEW DRAWING FRAME	2024/05/07



MECHANICAL DATA
 DURABILITY : 500 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~6GHZ
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1500V
 INSULATION RESISTANCE : 5000 MΩ MIN

10	GASKET	SILICONE RUBBER	RED	1
09	O RING B	SILICONE RUBBER	BLACK	1
08	CENTER CONTACT	Be.Cu	GOLD	1
07	INSULATOR B	TEFLON	NONE	1
06	BULLET CONTACT	BRASS	GOLD	1
05	CABLE BODY	BRASS	NICKEL	1
04	O RING A	SILICONE RUBBER	RED	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE
 TNC(F)4 hole w/Oring, solder type for .085 cable, pin in pin, 5psi

DWG NO.
 C18CG3F085015T

CUST.
 P/N: N/A
 DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES	DRAWN BY: Kelly	2024/05/07
.X ±0.2	CHK'D BY: Kana	2024/05/07
.XX ±0.2		
.XXX ±0.2		
ANGLES N/A		
	REV.	1.50
	DA2405060017	