









REV	DESCRIPTION	DATE
X1	INITIAL DESIGN	2022/06/14
X2	NEW DRAWING FRAME	2024/11/01



RECOMMENDED MOUNTING HOLE



RECOMMENDED STRIP LENGTHS

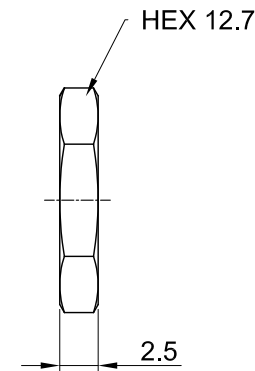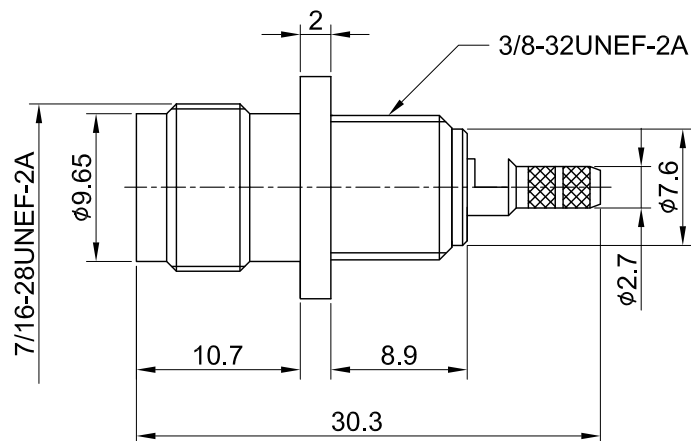

PRELIMINARY

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~3GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1000V  
 INSULATION RESISTANCE : 5000 MΩ MIN

NOTE  
 NO LEAKAGE THROUGH CENTER PIN  
 ALLOWED AT 5PSI. (5PSI防水)

10	NUT	BRASS	NICKEL	1
09	WASHER	P.BRONZE	NICKEL	1
08	O RING	SILICONE RUBBER	RED	1
07	FERRULE	BRASS	NICKEL	1
06	BARREL	BRASS	NICKEL	1
05	GASKET	SILICONE RUBBER	RED	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE  
 TNC(F) st. bh. front mount with Oring for RG174/RG316 (5PSI)

DWG NO.  
 C18CUWS174023T

CUST.  
 P/N: N/A  
 DWG NO: N/A

SHEET 1 of 1 Unit: mm



**Wellshow**

GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	DRAWN BY: Kelly	2024/11/01
	CHK'D BY: Chili	2024/11/01
	DA2410300026	REV. X2