




REV	DESCRIPTION	DATE
1.10	CHG PIN DESIGN	2017/06/27
1.20	NEW DRAWING FRAME	2024/11/01









RECOMMENDED MOUNTING HOLE



0.81~1.48 CABLE RECOMMENDED STRIP LENGTHS



RG178 CABLE RECOMMENDED STRIP LENGTHS

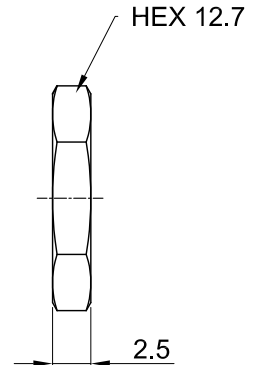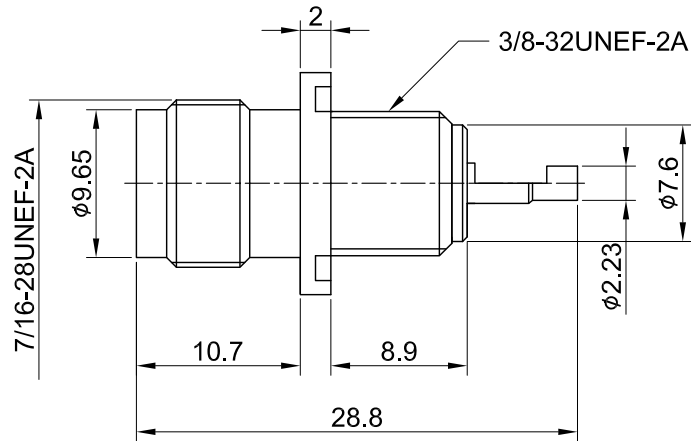

MECHANICAL DATA
 DURABILITY : 100 CYCLES
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
 FREQUENCY RANGE: DC~3GHz
 IMPEDANCE : 50Ω
 VSWR : 1.5 MAX.
 WORKING VOLTAGE : AC 500V
 WITHSTANDING VOLTAGE : AC 1000V
 INSULATION RESISTANCE : 5000 MΩ MIN

NOTE
 NO LEAKAGE THROUGH CENTER PIN
 ALLOWED AT 5PSI. (5PSI防水)

10	NUT	BRASS	NICKEL	1
09	WASHER	P.BRONZE	NICKEL	1
08	O RING	SILICONE RUBBER	RED	1
07	FERRULE	BRASS	NICKEL	1
06	BARREL	BRASS	NICKEL	1
05	GASKET	SILICONE RUBBER	RED	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Kelly		2024/11/01
TNC(F) st. bh. front mount with Oring for 0.81~RG178 (5PSI)		CHK'D BY: Chili		2024/11/01
DWG NO.		DA2410300027		REV.
C18CUWS178023T		DA2410300027		1.20
CUST. P/N: N/A		GENERAL TOLERANCES		
DWG NO: N/A		.X ±0.2		
SHEET 1 of 1		.XX ±0.2		
Unit: mm		.XXX ±0.2		
		ANGLES N/A		

