
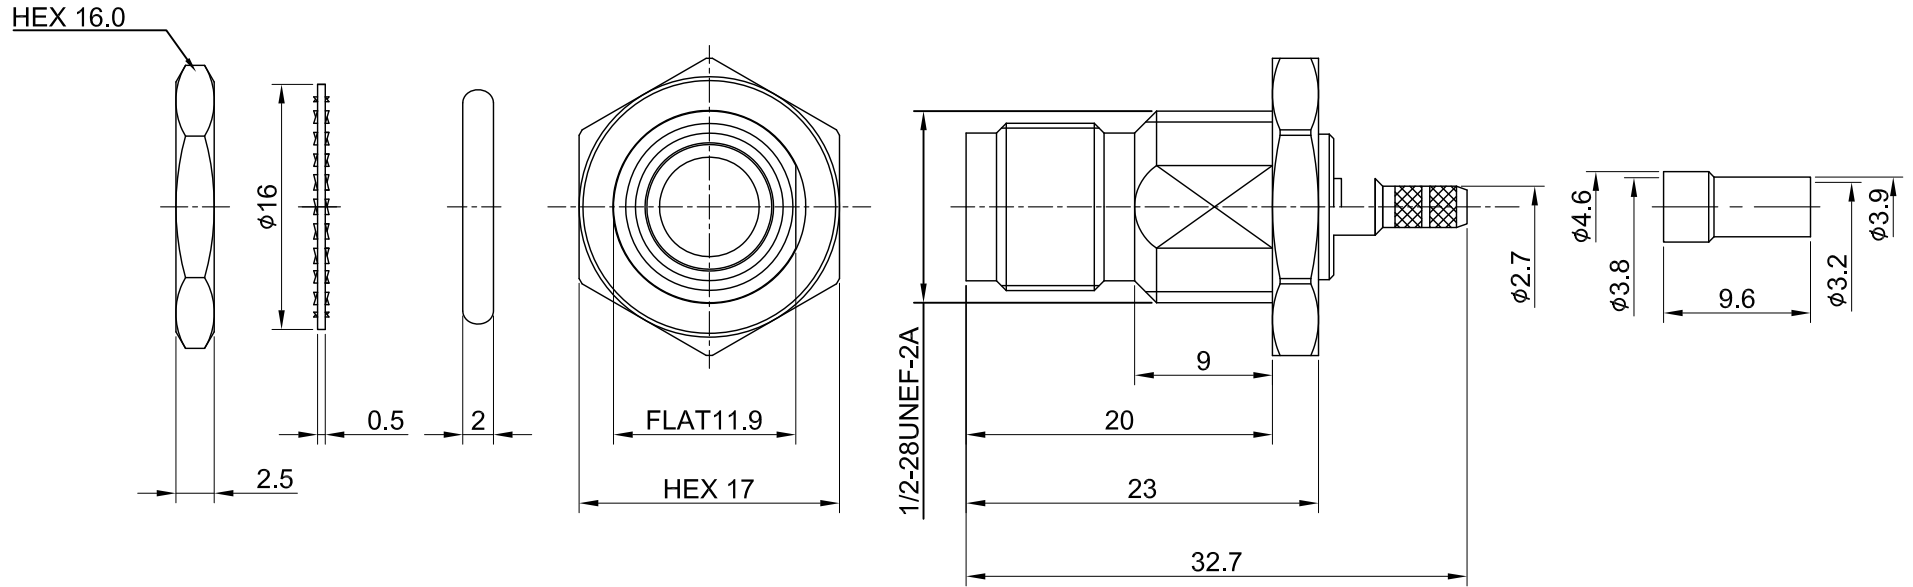


REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2021/01/14
1.10	NEW DRAWING FRAME	2024/06/19

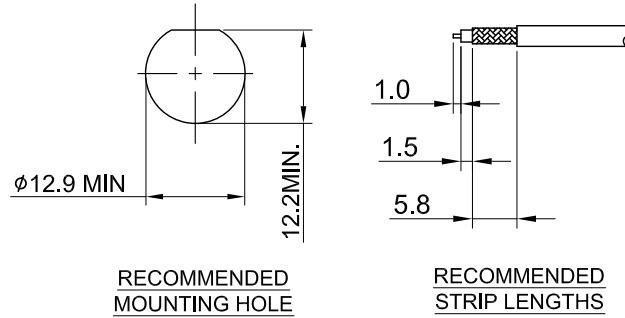

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~3GHZ  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1000V  
 INSULATION RESISTANCE : 5000 MΩ MIN

10	FERRULE	BRASS	NICKEL	1
09	CENTER PIN	P.BRONZE	GOLD	1
08	BARREL	BRASS	NICKEL	1
07	GASKET	SILICONE RUBBER	NONE	1
06	INSULATOR B	TEFLON	NONE	1
05	INSULATOR A	TEFLON	NONE	1
04	BODY	STAINLESS STEEL	PASSIVATED	1
03	O RING	SILICONE RUBBER	BLACK	1
02	WASHER	STAINLESS STEEL	NICKEL	1
01	NUT	STAINLESS STEEL	PASSIVATED	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE  
 TNC(F) bh. w. Oring crimp for RG174 Stainless/Passivated(5psi), 3GHz

DWG NO.  
 C18EDWS174003V

CUST.  
 P/N: N/A  
 DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES		DRAWN BY: Kelly 2024/06/19	
.X	±0.2		CHK'D BY: Maria 2024/06/19 REV. 1.10
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A	DA2406190006	