


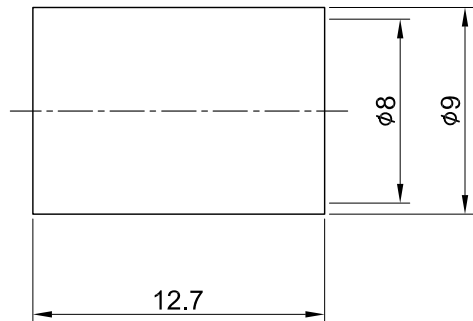


REV	DESCRIPTION	DATE
2.10	UPDATE GASKET MATERIAL AND FINISH, CORRECT 14.1 W. 12.8	2021/08/24
2.20	NEW DRAWING FRAME	2024/04/08

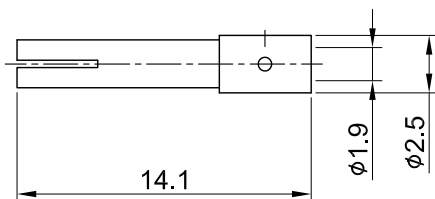

RECOMMENDED STRIP LENGTHS

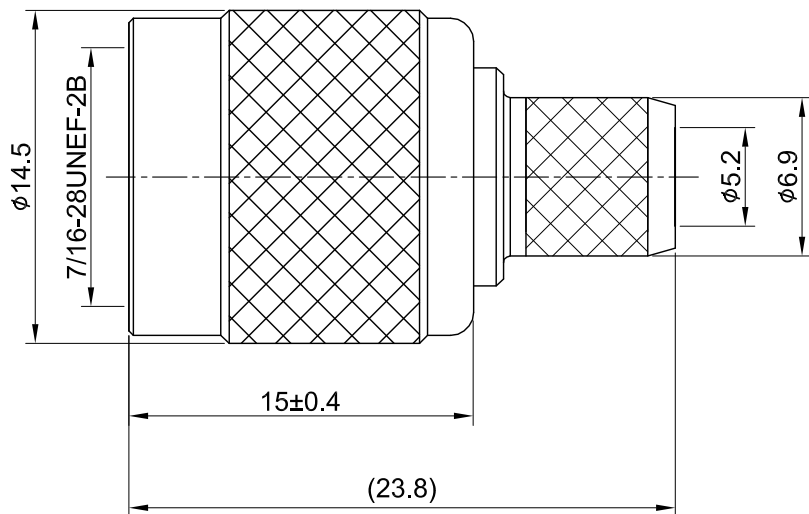

MECHANICAL DATA  
 DURABILITY : 100 CYCLES  
 TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
 FREQUENCY RANGE: DC~6GHz  
 IMPEDANCE : 50Ω  
 VSWR : 1.5 MAX.  
 WORKING VOLTAGE : AC 500V  
 WITHSTANDING VOLTAGE : AC 1500V  
 INSULATION RESISTANCE : 5000 MΩ MIN

NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	TITLE	SHEET	Unit: mm
08	FERRULE	BRASS	NICKEL	1	RPTNC(M) st. crimp type for LMR300, Nickel	1 of 1	mm
07	CENTER PIN	P.BRONZE	GOLD	1			
06	BODY	BRASS	NICKEL	1			
05	WASHER	BRASS	NICKEL	1	DWG NO.	C25CA3FL30002	
04	GASKET	SILICONE RUBBER	RED	1	CUST.		
03	INSULATOR	TEFLON	NONE	1	P/N: N/A	DRAWN BY: Kelly 2024/04/08 CHK'D BY: Dora 2024/04/08	
02	INNER RETAINING RING	BRASS	NONE	1	DWG NO: N/A		
01	SHELL	BRASS	NICKEL	1		REV.	
						DA2403260011	2.20

GENERAL TOLERANCES  
 .X ±0.2  
 .XX ±0.2  
 .XXX ±0.2  
 ANGLES N/A

DRAWN BY: Kelly 2024/04/08  
 CHK'D BY: Dora 2024/04/08

DA2403260011