




REV	DESCRIPTION	DATE
2.02	REMOVE PIN ORDER DIAMETER SIZE	2021/07/22
2.10	NEW DRAWING FRAME	2024/04/09
2.11	CHG WASHER MATERIAL BRASS W. STEEL	2024/08/13



RECOMMENDED MOUNTING HOLE



RECOMMENDED STRIP LENGTHS

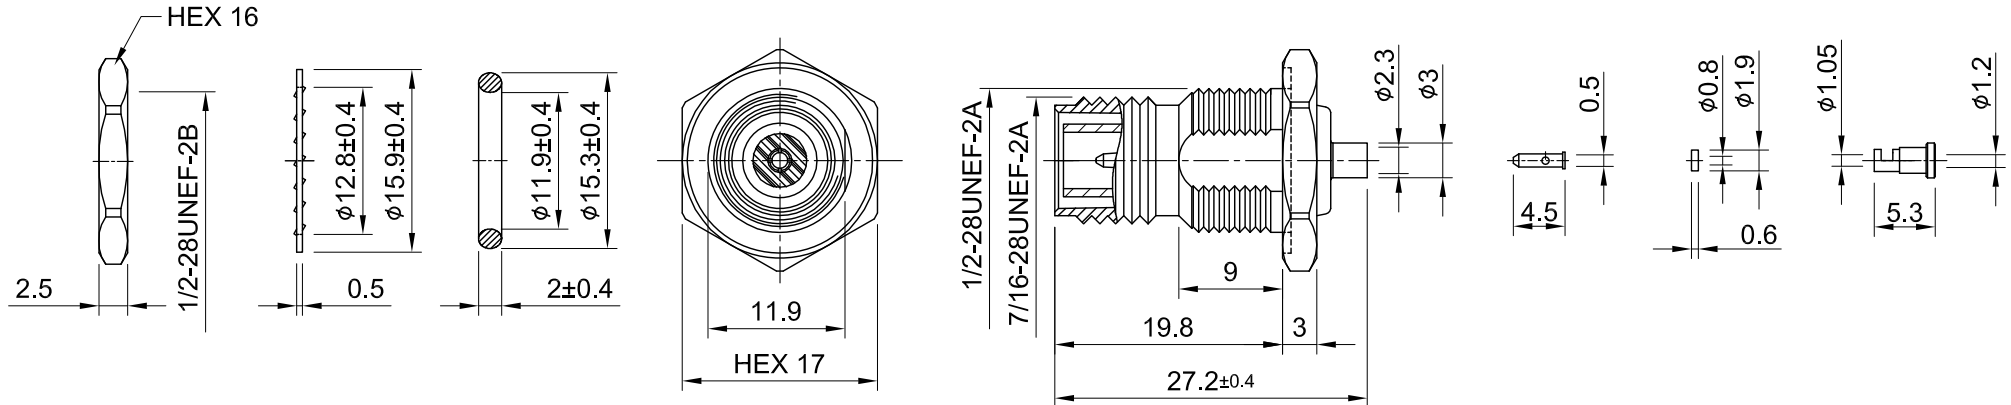

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

10	NUT	BRASS	NICKEL	1
09	LOCK WASHER	BRASS	NICKEL	1
08	O RING	SILICONE RUBBER	BLACK	1
07	GASKET	TEFLON	NONE	1
06	FERRULE	BRASS	GOLD	1
05	BULLET CONTACT	BRASS	GOLD	1
04	CHASSIS	BRASS	NICKEL	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE
RPTNC(F)st.bh.w/o-ring crimp for 1.13/1.13LL cable

DWG NO.
C26CD3F113003H

CUST.
P/N: N/A
DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES		DRAWN BY: Kelly 2024/08/13	
.X	±0.2	CHK'D BY: Kana 2024/08/13	REV. 2.11
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A	DA2408130018	