



RECOMMENDED MOUNTING HOLE



RECOMMENDED STRIP LENGTHS

REV	DESCRIPTION	DATE
2.01	CORRECT ORING COLOR BLACK W. RED, CHG 12 W. 11.9	2021/07/20
2.10	CHG WASHER MATERIAL BRASS W. STEEL	2024/08/13
2.20	CHG DRAWING O-RING TRENCH DEPTH	2025/03/07

HEX 16

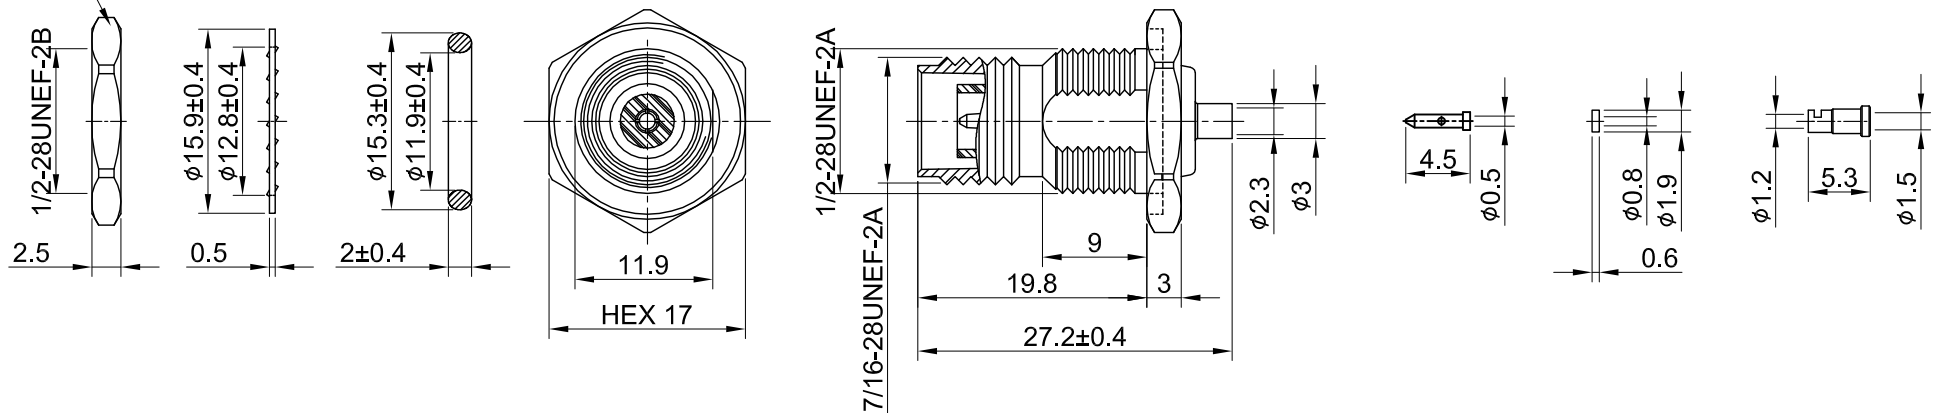

MECHANICAL DATA  
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
FREQUENCY RANGE: DC~6GHz  
IMPEDANCE : 50Ω  
VSWR : 1.5 MAX.  
WORKING VOLTAGE : AC 500V  
WITHSTANDING VOLTAGE : AC 1500V  
INSULATION RESISTANCE : 5000 MΩ MIN

10	NUT	BRASS	NICKEL	1
09	WASHER	BRASS	NICKEL	1
08	O RING	SILICONE RUBBER	BLACK	1
07	FERRULE	BRASS	GOLD	1
06	GASKET	TEFLON	NONE	1
05	BULLET CONTACT	BRASS	GOLD	1
04	CHASSIS	BRASS	NICKEL	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE  
RPTNC(F)st.bh.w/o-ring crimp for 1.32/1.32DS cable

DWG NO.  
C26CD3F132003H

CUST. P/N: N/A  
DWG NO: N/A

SHEET 1 of 1 Unit: mm

GENERAL TOLERANCES  
.X ±0.2  
.XX ±0.2  
.XXX ±0.2  
ANGLES N/A

DRAWN BY: Oscar 2025/03/07  
CHK'D BY: Eileen 2025/03/07

REV. 2.20  
DA2503050003